

**APPENDIX F. PRODUCT SAFETY REPORT**

**Technical Report No. 72120951-000****Rev. -****Dated: 2016-10-18**

Client: Election Systems & Software LLC  
11208 John Galt Blvd.  
Omaha, NE 68137 USA

Manufacturing place: Election Systems & Software LLC  
11208 John Galt Blvd.  
Omaha, NE 68137 USA

Test subject: Product: Central Count Scanner and Tabulator  
Type: DS450

Test specification: UL 60950-1:2007/R:2014-10

Purpose of examination: 

- Test according to the test specification.

Test result: *The test results show that the presented product is in compliance with the specified requirements.*

This technical report may only be quoted in full. Any use for advertising purposes must be granted in writing. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production.



## 1 Description of the test subject

### 1.1 Function

#### ***Manufacturer's specification for intended use:***

The model DS450 central count scanner and tabulator is mounted on a cart with supporting separately certified equipment that consists of a certified laser scanner, certified dot matrix printer and a certified UPS. Both printers along with the central count scanner and tabulator plugs into the UPS outlets. The ballots cannot be scanned and laser printer printing at the same time. The system process is that the ballots are scanned, then results are download electronically via the UPS connector or printed via the laser printer. The dot matrix printer is for system command reporting.

The central count scanner and tabulator power is supplied to the appliance inlet via a detachable power supply cord which has not been evaluated.

#### ***Manufacturer's specification for predictive misuse:***

No restrictions provided.

### 1.2 Consideration of the foreseeable misuse

- Not applicable*
- Covered through the applied standard*
- Covered by the following comment*
- Covered by attached risk analysis*

### 1.3 Technical Data

120VAC, 50/60HZ, 12A, Class I equipment

## 2.0 Order

### 2.1 Date of Purchase Order, Customer's Reference

NTS PO #PRPO054733-2 Issued on: 2016-09-30

TUV Reference No: 72120951

**2.2 Receipt of Test Sample, Location**

2016-10-05

**2.3 Date of Testing**

2016-10-05 and 2016-10-06

**2.4 Location of Testing**

TÜV SÜD America Inc.  
5610 West Sligh Ave., Suite 100  
Tampa, FL 33634 USA

**2.5 Points of Non-compliance or Exceptions of the Test Procedure**

None.

**3. Test Results****3.1 Positive Test Results**

- *Electrical safety*  
UL 60950-1:2007/R:2014-10
- *Mechanical safety*  
UL 60950-1:2007/R:2014-10

*"The test specifications are met."*

**3.2 Points of non-compliance according to the test specification**

None.

**4. Remark**

The user manual has been examined according to the minimum requirements described in the product standard. The manufacturer is responsible for the accuracy of further particulars as well as of the composition and layout.

**5. Summary**



Positive

*"The test specifications are met."*

TÜV SÜD Product Service GmbH

Engineer:   
Karl Wagner

Technical Report checked:   
David Dorfner

|  |   |   |
|--|---|---|
|  |   |  |
| <b>TEST REPORT</b><br><b>IEC 60950-1</b><br><b>Information technology equipment – Safety –</b><br><b>Part 1: General requirements</b>  |   |   |
| <b>Report Number</b> .....   | 72120951-000  |   |
| <b>Date of issue</b> .....   | 2016-10-18  |   |
| <b>Total number of pages</b> .....   | 45  |   |
| <b>CB Testing Laboratory</b> .....   | TÜV SÜD America Inc.  |   |
| <b>Address</b> .....   | 5610 West Sligh Ave., Suite 100, Tampa, FL 33634 USA                                |   |
| <b>Applicant's name</b> .....  | Election Systems & Software LLC   |   |
| <b>Address</b> .....   | 11208 John Galt Blvd., Omaha, NE 68137 USA  |   |
| <b>Manufacturer's name</b> .....   | Election Systems & Software LLC   |   |
| <b>Address</b> .....   | 11208 John Galt Blvd., Omaha, NE 68137 USA  |   |
| <b>Test specification:</b>   |   |   |
| <b>Standard</b> .....  | UL 60950-1:2007/R:2014-10   |   |
| <b>Test procedure</b> .....  | Report Only   |   |
| <b>Non-standard test method</b> .....  | N/A   |   |
| <b>Test Report Form No</b> .....   | IEC60950_1E   |   |
| <b>Test Report Form(s) Originator</b> .....  | SGS Fimko Ltd   |   |
| <b>Master TRF</b> .....  | Dated 2013-07   |   |
| <p><b>Copyright © 2013 Worldwide System for Conformity Testing and Certification of Electrotechnical Equipment and Components (IECEE), Geneva, Switzerland. All rights reserved.</b></p> <p>This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.</p> <p>If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.</p> <p><b>This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.</b></p> |   |   |
| <b>Test item description</b> .....   | Central Count Scanner and Tabulator   |   |
| <b>Trade Mark</b> .....  |  |   |
| <b>Manufacturer</b> .....  | Election Systems & Software LLC<br>11208 John Galt Blvd., Omaha, NE 68137 USA       |   |
| <b>Model/Type reference</b> .....  | DS450   |   |
| <b>Ratings</b> .....   | 120VAC, 50/60HZ, 12A, Class I equipment   |   |

| Testing procedure and testing location: |   |                         |
|---|---|-------------------------|
| <input checked="" type="checkbox"/>     | Testing Laboratory:   |                         |
| Testing location/ address .....         | TÜV SÜD America Inc.<br>5610 West Sligh Ave., Suite 100,<br>Tampa, FL 33634 USA |                         |
| Tested by (name + signature) .....      | Karl Wagner   | <i>Karl Wagner</i>      |
| Approved by (name + signature) .....    | David Dorfner   | <i>David B. Dorfner</i> |

**List of Attachments (including a total number of pages in each attachment):**

Attachment 1: US National Differences (15 pages)

Attachment 2: Photos (5 pages)

**Summary of testing:**

The product fulfills the requirements of UL 60950-1:2007/R:2014-10.


MNL: Unit cannot scan ballots and print from the laser printer at the same time. The laser printer and the scan equipment are plugged into the UPS outlets. Max input current draw on the UPS input is with the laser printer printing. The UPS current rating is 12A. Scanning ballots is the worst case load for the DS450 central count scanner and tabulator.

**Tests performed (name of test and test clause):**

All required for this investigation.

**Testing location:**TÜV SÜD America Inc.  
5610 West Sligh Ave., Suite 100  
Tampa, FL 33634 USA**Summary of compliance with National Differences****List of countries addressed:**

This report includes US National Differences.

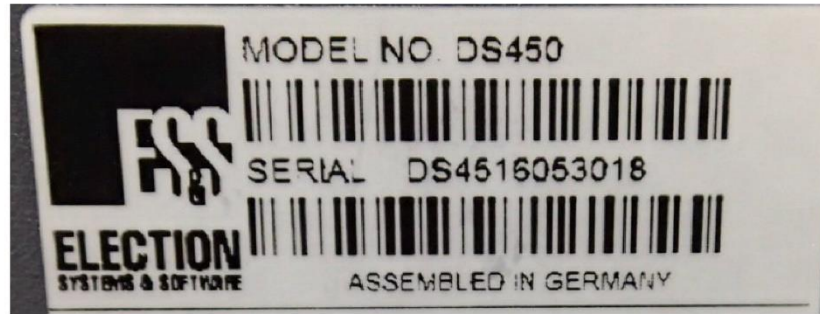**Copy of marking plate**


Input 120VAC, 50/60Hz, 12A



|   |  |
|---|--|
| <b>Test item particulars.....:</b>  |  |
| <b>Equipment mobility.....:</b>   | <input type="checkbox"/> movable <input type="checkbox"/> hand-held <input type="checkbox"/> transportable<br><input checked="" type="checkbox"/> stationary <input type="checkbox"/> for building-in <input type="checkbox"/> direct plug-in  |
| <b>Connection to the mains.....:</b>  | <input type="checkbox"/> pluggable equipment <input checked="" type="checkbox"/> type A <input type="checkbox"/> type B<br><input type="checkbox"/> permanent connection<br><input type="checkbox"/> detachable power supply cord<br><input type="checkbox"/> non-detachable power supply cord<br><input type="checkbox"/> not directly connected to the mains |
| <b>Operating condition.....:</b>  | <input checked="" type="checkbox"/> continuous<br><input type="checkbox"/> rated operating / resting time:   |
| <b>Access location .....</b>  | <input checked="" type="checkbox"/> operator accessible<br><input type="checkbox"/> restricted access location   |
| <b>Over voltage category (OVC) .....</b>  | <input type="checkbox"/> OVC I <input checked="" type="checkbox"/> OVC II <input type="checkbox"/> OVC III <input type="checkbox"/> OVC IV<br><input type="checkbox"/> other:  |
| <b>Mains supply tolerance (%) or absolute mains supply values .....</b> -10%, +6%   |  |
| <b>Tested for IT power systems .....</b> <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No  |  |
| <b>IT testing, phase-phase voltage (V) .....</b> N/A  |  |
| <b>Class of equipment .....</b>   | <input checked="" type="checkbox"/> Class I <input type="checkbox"/> Class II <input type="checkbox"/> Class III<br><input type="checkbox"/> Not classified  |
| <b>Considered current rating of protective device as part of the building installation (A) .....</b> 20A  |  |
| <b>Pollution degree (PD) .....</b>  | <input type="checkbox"/> PD 1 <input checked="" type="checkbox"/> PD 2 <input type="checkbox"/> PD 3   |
| <b>IP protection class .....</b> IPX0   |  |
| <b>Altitude during operation (m) .....</b> 2000 m max   |  |
| <b>Altitude of test laboratory (m) .....</b> 0 m  |  |
| <b>Mass of equipment (kg) .....</b> 147kg (Complete Unit (scanner and cart)<br>58.5kg (Scanner only)  |  |
| <b>Possible test case verdicts:</b>   |  |
| - test case does not apply to the test object.....: N/A   |  |
| - test object does meet the requirement.....: P (Pass)  |  |
| - test object does not meet the requirement.....: F (Fail)  |  |
| <b>Testing.....:</b>  |  |
| <b>Date of receipt of test item.....:</b> 2016-10-05  |  |
| <b>Date(s) of performance of tests .....</b> 2016-10-05 and 2016-10-06  |  |
| <b>General remarks:</b>   |  |
| The test results presented in this report relate only to the object tested.<br>This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.<br>"(see Enclosure #)" refers to additional information appended to the report.<br>"(see appended table)" refers to a table appended to the report. |  |
| <b>Throughout this report a <input type="checkbox"/> comma / <input checked="" type="checkbox"/> point is used as the decimal separator.</b>  |  |

|   |             |                            |              |                           |              |                         |           |                    |           |                     |           |                            |           |                                      |            |                         |           |
|---|-------------|----------------------------|--------------|---------------------------|--------------|-------------------------|-----------|--------------------|-----------|---------------------|-----------|----------------------------|-----------|--------------------------------------|------------|-------------------------|-----------|
| <p><b>Manufacturer's Declaration per sub-clause 4.2.5 of IEC60950:</b></p> <p>The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided.....:</p> <p style="text-align: right;"> <input type="checkbox"/> <b>Yes</b><br/> <input checked="" type="checkbox"/> <b>Not applicable</b> </p>  |             |                            |              |                           |              |                         |           |                    |           |                     |           |                            |           |                                      |            |                         |           |
| <p><b>When differences exist; they shall be identified in the General product information section.</b></p>  |             |                            |              |                           |              |                         |           |                    |           |                     |           |                            |           |                                      |            |                         |           |
| <p><b>Name and address of factory (ies) .....</b> : Election Systems &amp; Software LLC<br/>11208 John Galt Blvd., Omaha, NE 68137 USA</p>  |             |                            |              |                           |              |                         |           |                    |           |                     |           |                            |           |                                      |            |                         |           |
| <p><b>General product information:</b></p> <p>The model DS450 central count scanner and tabulator is mounted on a cart with supporting separately certified equipment that consists of a certified laser scanner, certified dot matrix printer and a certified UPS. Both printers along with the central count scanner and tabulator plugs into the UPS outlets. The ballots cannot be scanned and laser printer printing at the same time. The system process is that the ballots are scanned, then results are download electronically via the UPS connector or printed via the laser printer. The dot matrix printer is for system command reporting.</p> <p>The central count scanner and tabulator power is supplied to the appliance inlet via a detachable power supply cord which has not been evaluated.</p> |             |                            |              |                           |              |                         |           |                    |           |                     |           |                            |           |                                      |            |                         |           |
| <p><b>Abbreviations used in the report:</b></p> <table style="width: 100%; border: none;"> <tr> <td style="width: 50%;">- normal conditions</td> <td style="width: 10%;"><b>N.C.</b></td> <td style="width: 30%;">- single fault conditions</td> <td style="width: 10%;"><b>S.F.C</b></td> </tr> <tr> <td>- functional insulation</td> <td><b>OP</b></td> <td>- basic insulation</td> <td><b>BI</b></td> </tr> <tr> <td>- double insulation</td> <td><b>DI</b></td> <td>- supplementary insulation</td> <td><b>SI</b></td> </tr> <tr> <td>- between parts of opposite polarity</td> <td><b>BOP</b></td> <td>- reinforced insulation</td> <td><b>RI</b></td> </tr> </table> <p>Indicate used abbreviations (if any)</p>  |             | - normal conditions        | <b>N.C.</b>  | - single fault conditions | <b>S.F.C</b> | - functional insulation | <b>OP</b> | - basic insulation | <b>BI</b> | - double insulation | <b>DI</b> | - supplementary insulation | <b>SI</b> | - between parts of opposite polarity | <b>BOP</b> | - reinforced insulation | <b>RI</b> |
| - normal conditions   | <b>N.C.</b> | - single fault conditions  | <b>S.F.C</b> |                           |              |                         |           |                    |           |                     |           |                            |           |                                      |            |                         |           |
| - functional insulation   | <b>OP</b>   | - basic insulation         | <b>BI</b>    |                           |              |                         |           |                    |           |                     |           |                            |           |                                      |            |                         |           |
| - double insulation   | <b>DI</b>   | - supplementary insulation | <b>SI</b>    |                           |              |                         |           |                    |           |                     |           |                            |           |                                      |            |                         |           |
| - between parts of opposite polarity  | <b>BOP</b>  | - reinforced insulation    | <b>RI</b>    |                           |              |                         |           |                    |           |                     |           |                            |           |                                      |            |                         |           |

| IEC 60950-1 |  |  |         |
|-------------|--|--|---------|
| Clause      | Requirement + Test   | Result - Remark  | Verdict |
| 1           | <b>GENERAL</b>   |  | —       |
| <b>1.5</b>  | <b>Components</b>  |  | P       |
| 1.5.1       | General  |  | P       |
|             | Comply with IEC 60950-1 or relevant component standard   | (see appended tables 1.5.1)  | P       |
| 1.5.2       | Evaluation and testing of components   | Certified components are used in accordance with their ratings, certifications and they comply with applicable parts of this standard.<br>Components not certified are used in accordance with their ratings and they comply with applicable parts of UL 60950-1 and the relevant component standard.<br>Components, for which no relevant UL-standard exists, have been tested under the conditions occurring in the equipment, using applicable parts of UL 60950-1. | P       |
| 1.5.3       | Thermal controls   | None unless part of certified power supply.  | N/A     |
| 1.5.4       | Transformers   | None unless part of certified power supply.  | N/A     |
| 1.5.5       | Interconnecting cables   | No interconnecting cables provided with device.  | N/A     |
| 1.5.6       | Capacitors bridging insulation   | None unless part of certified power supply.  | N/A     |
| 1.5.7       | Resistors bridging insulation  | None unless part of certified power supply.  | N/A     |
| 1.5.7.1     | Resistors bridging functional, basic or supplementary insulation                                   |  | N/A     |
| 1.5.7.2     | Resistors bridging double or reinforced insulation between a.c. mains and other circuits           |  | N/A     |
| 1.5.7.3     | Resistors bridging double or reinforced insulation between a.c. mains and antenna or coaxial cable |  | N/A     |
| 1.5.8       | Components in equipment for IT power systems   | Not evaluated for IT power systems.  | N/A     |
| 1.5.9       | Surge suppressors  | None provided.   | N/A     |
| 1.5.9.1     | General  |  | N/A     |
| 1.5.9.2     | Protection of VDRs   |  | N/A     |
| 1.5.9.3     | Bridging of functional insulation by a VDR   |  | N/A     |
| 1.5.9.4     | Bridging of basic insulation by a VDR  |  | N/A     |

| IEC 60950-1 |   |  |         |
|-------------|---|--|---------|
| Clause      | Requirement + Test  | Result - Remark  | Verdict |
| 1.5.9.5     | Bridging of supplementary, double or reinforced insulation by a VDR |  | N/A     |
| <b>1.6</b>  | <b>Power interface</b>  |  | P       |
| 1.6.1       | AC power distribution systems                                       | TN   | P       |
| 1.6.2       | Input current   | (see appended table 1.6.2)   | P       |
| 1.6.3       | Voltage limit of hand-held equipment                                | Not hand-held  | N/A     |
| 1.6.4       | Neutral conductor   | Neutral is insulated from earth with basic insulation throughout the equipment.      | P       |
| <b>1.7</b>  | <b>Marking and instructions</b>                                     |  | P       |
| 1.7.1       | Power rating and identification markings                            | The required marking is located on the outside surface of the equipment.             | P       |
| 1.7.1.1     | Power rating marking  | The required marking is located on the outside surface of the equipment.             | P       |
|             | Multiple mains supply connections.....:                             | The equipment does not have multiple mains connections.                              | N/A     |
|             | Rated voltage(s) or voltage range(s) (V) .....                      | 120VAC   | P       |
|             | Symbol for nature of supply, for d.c. only .....                    | The equipment is for a.c. supply.  | N/A     |
|             | Rated frequency or rated frequency range (Hz) ....:                 | 50/60Hz  | P       |
|             | Rated current (mA or A) .....                                       | Refer to marking plate, page 4.  | P       |
| 1.7.1.2     | Identification markings   |  | P       |
|             | Manufacturer's name or trade-mark or identification mark .....      |  | P       |
|             | Model identification or type reference .....                        | DS450  | P       |
|             | Symbol for Class II equipment only .....                            | The equipment is not Class II.   | N/A     |
|             | Other markings and symbols .....                                    | None.  | N/A     |
| 1.7.1.3     | Use of graphical symbols  | None.  | N/A     |
| 1.7.2       | Safety instructions and marking                                     | Sufficient instructions for installation and use provided.                           | P       |
| 1.7.2.1     | General   | The equipment is not Class II.   | N/A     |
| 1.7.2.2     | Disconnect devices  | Statement not required.  | N/A     |
| 1.7.2.3     | Overcurrent protective device                                       | Not Pluggable Type B or permanently connected.                                       | N/A     |
| 1.7.2.4     | IT power distribution systems                                       | Not evaluated for IT power systems.  | N/A     |

| IEC 60950-1 |  |   |         |
|-------------|--|---|---------|
| Clause      | Requirement + Test   | Result - Remark   | Verdict |
| 1.7.2.5     | Operator access with a tool  | Tool required to access any circuits. User not directed to use a tool to gain access.           | N/A     |
| 1.7.2.6     | Ozone  | The equipment does not produce ozone.   | N/A     |
| 1.7.3       | Short duty cycles  | The equipment is intended for continuous operation.   | N/A     |
| 1.7.4       | Supply voltage adjustment .....  | No supply adjustment on the equipment.  | N/A     |
|             | Methods and means of adjustment; reference to installation instructions .....        |   | N/A     |
| 1.7.5       | Power outlets on the equipment .....   | None.   | N/A     |
| 1.7.6       | Fuse identification (marking, special fusing characteristics, cross-reference) ..... | No operator replaceable fuses.  | N/A     |
| 1.7.7       | Wiring terminals   | No wiring terminals.  | N/A     |
| 1.7.7.1     | Protective earthing and bonding terminals .....                                      | Marked appliance inlet.   | P       |
| 1.7.7.2     | Terminals for a.c. mains supply conductors   | The equipment is not permanently connected or provided with a non-detachable power supply cord. | N/A     |
| 1.7.7.3     | Terminals for d.c. mains supply conductors   | Not for connection to a d.c. mains.   | N/A     |
| 1.7.8       | Controls and indicators  | None provided.  | N/A     |
| 1.7.8.1     | Identification, location and marking .....   |   | N/A     |
| 1.7.8.2     | Colours .....  |   | N/A     |
| 1.7.8.3     | Symbols according to IEC 60417 .....   |   | N/A     |
| 1.7.8.4     | Markings using figures .....   |   | N/A     |
| 1.7.9       | Isolation of multiple power sources .....  | Single input.   | N/A     |
| 1.7.10      | Thermostats and other regulating devices .....                                       | No thermostats or other regulating devices.   | N/A     |
| 1.7.11      | Durability   | The marking withstands required tests.  | P       |
| 1.7.12      | Removable parts  | No marking on removable parts.  | N/A     |
| 1.7.13      | Replaceable batteries .....  | No batteries.   | N/A     |
|             | Language(s) .....  |   | —       |
| 1.7.14      | Equipment for restricted access locations.....                                       | Not intended for restricted access.   | N/A     |
| <b>2</b>    | <b>PROTECTION FROM HAZARDS</b>   |   | P       |
| <b>2.1</b>  | <b>Protection from electric shock and energy hazards</b>                             |   | P       |
| 2.1.1       | Protection in operator access areas  | Refer below:  | P       |

| IEC 60950-1 |  |   |         |
|-------------|--|---|---------|
| Clause      | Requirement + Test   | Result - Remark   | Verdict |
| 2.1.1.1     | Access to energized parts  | All covers / guards preventing access to energized parts require a tool for removal. Checked by test finger and test pin. | P       |
|             | Test by inspection .....   |   | P       |
|             | Test with test finger (Figure 2A) .....  | No parts accessible with test finger.   | P       |
|             | Test with test pin (Figure 2B) .....   | No parts accessible with test pin.  | P       |
|             | Test with test probe (Figure 2C) .....   | No TNV circuits.  | N/A     |
| 2.1.1.2     | Battery compartments   | No battery compartments, no TNV circuits.   | N/A     |
| 2.1.1.3     | Access to ELV wiring   | No accessible wiring.   | N/A     |
|             | Working voltage (V <sub>peak</sub> or V <sub>rms</sub> ); minimum distance through insulation (mm) |   | —       |
| 2.1.1.4     | Access to hazardous voltage circuit wiring   | No accessible to hazardous voltage wiring.  | P       |
| 2.1.1.5     | Energy hazards .....   | No accessible to energy hazards,  | P       |
| 2.1.1.6     | Manual controls  | No manual controls.   | N/A     |
| 2.1.1.7     | Discharge of capacitors in equipment   | Complies.   | P       |
|             | Measured voltage (V); time-constant (s) .....  | Initial value: 180Vp<br>37% value: 54Vp<br>1 second value: 0Vp  | —       |
| 2.1.1.8     | Energy hazards – d.c. mains supply   | The equipment is not intended to connect to a d.c. mains.   | N/A     |
|             | a) Capacitor connected to the d.c. mains supply .. :   |   | N/A     |
|             | b) Internal battery connected to the d.c. mains supply .....                                       |   | N/A     |
| 2.1.1.9     | Audio amplifiers .....   | No audio amplifiers.  | N/A     |
| 2.1.2       | Protection in service access areas   | No service areas.   | N/A     |
| 2.1.3       | Protection in restricted access locations  | Not for use in restricted access locations.   | N/A     |

|            |   |  |   |
|------------|---|--|---|
| <b>2.2</b> | <b>SELV circuits</b>                                |  | P |
| 2.2.1      | General requirements                                | SELV circuits provided by the certified PSU output.      | P |
| 2.2.2      | Voltages under normal conditions (V) .....          | Refer to 2.2.1.  | P |
| 2.2.3      | Voltages under fault conditions (V) .....           | Refer to 2.2.1.  | P |
| 2.2.4      | Connection of SELV circuits to other circuits ..... | SELV circuits are only connected to other SELV circuits. | P |

| IEC 60950-1 |                    |                 |         |
|-------------|--------------------|-----------------|---------|
| Clause      | Requirement + Test | Result - Remark | Verdict |

| 2.3     | TNV circuits   |                 | N/A |
|---------|--|-----------------|-----|
| 2.3.1   | Limits   | No TNV circuits | N/A |
|         | Type of TNV circuits..... :                              |                 | —   |
| 2.3.2   | Separation from other circuits and from accessible parts |                 | N/A |
| 2.3.2.1 | General requirements                                     |                 | N/A |
| 2.3.2.2 | Protection by basic insulation                           |                 | N/A |
| 2.3.2.3 | Protection by earthing                                   |                 | N/A |
| 2.3.2.4 | Protection by other constructions ..... :                |                 | N/A |
| 2.3.3   | Separation from hazardous voltages                       |                 | N/A |
|         | Insulation employed ..... :                              |                 | —   |
| 2.3.4   | Connection of TNV circuits to other circuits             |                 | N/A |
|         | Insulation employed ..... :                              |                 | —   |
| 2.3.5   | Test for operating voltages generated externally         |                 | N/A |

| 2.4   | Limited current circuits                                 |                              | N/A |
|-------|--|------------------------------|-----|
| 2.4.1 | General requirements                                     | No limited current circuits. | N/A |
| 2.4.2 | Limit values   |                              | N/A |
|       | Frequency (Hz)..... :                                    |                              | —   |
|       | Measured current (mA) ..... :                            |                              | —   |
|       | Measured voltage (V) ..... :                             |                              | —   |
|       | Measured circuit capacitance (nF or µF) ..... :          |                              | —   |
| 2.4.3 | Connection of limited current circuits to other circuits |                              | N/A |

| 2.5 | Limited power sources  | No output ports. | N/A |
|-----|--|------------------|-----|
|     | a) Inherently limited output   |                  | N/A |
|     | b) Impedance limited output  |                  | N/A |
|     | c) Regulating network limited output under normal operating and single fault condition |                  | N/A |
|     | d) Overcurrent protective device limited output  |                  | N/A |
|     | Max. output voltage (V), max. output current (A), max. apparent power (VA) ..... :     |                  | —   |
|     | Current rating of overcurrent protective device (A) .:                                 |                  | —   |
|     | Use of integrated circuit (IC) current limiters  |                  |     |

| 2.6 | Provisions for earthing and bonding |  | P |
|-----|-------------------------------------|--|---|
|-----|-------------------------------------|--|---|

| IEC 60950-1 |   |  |         |
|-------------|---|--|---------|
| Clause      | Requirement + Test  | Result - Remark  | Verdict |
| 2.6.1       | Protective earthing   | No accessible metal that can be energized by a single fault. Appliance inlet has a PE terminal.            | N/A     |
| 2.6.2       | Functional earthing   | No functional earthing terminals provided.   | N/A     |
|             | Use of symbol for functional earthing .....   |  | N/A     |
| 2.6.3       | Protective earthing and protective bonding conductors   | Refer below.   | P       |
| 2.6.3.1     | General   | Refer below.   | P       |
| 2.6.3.2     | Size of protective earthing conductors  | Earth terminal of certified appliance inlet serves as PE conductor.  | P       |
|             | Rated current (A), cross-sectional area (mm <sup>2</sup> ), AWG .....   |  | —       |
| 2.6.3.3     | Size of protective bonding conductors   | Refer below.   | P       |
|             | Rated current (A), cross-sectional area (mm <sup>2</sup> ), AWG .....   | Min.18AWG wire used  | —       |
|             | Protective current rating (A), cross-sectional area (mm <sup>2</sup> ), AWG.....  | 20A.   |         |
| 2.6.3.4     | Resistance of earthing conductors and their terminations; resistance (Ω), voltage drop (V), test current (A), duration (min)..... | 40A applied for 2 minutes from AC inlet to AC outlet earthing terminals. The measured resistance was 59mΩ. | P       |
| 2.6.3.5     | Colour of insulation .....  | Green/yellow.  | N/A     |
| 2.6.4       | Terminals   | No terminals provided.   | N/A     |
| 2.6.4.1     | General   |  | N/A     |
| 2.6.4.2     | Protective earthing and bonding terminals   | Earth terminal of certified appliance inlet serves as PE conductor.  | N/A     |
|             | Rated current (A), type, nominal thread diameter (mm).....  |  | —       |
| 2.6.4.3     | Separation of the protective earthing conductor from protective bonding conductors  |  | N/A     |
| 2.6.5       | Integrity of protective earthing  |  | N/A     |
| 2.6.5.1     | Interconnection of equipment  | Not a system of interconnected equipment or marked as a Class II device.                                   | N/A     |
| 2.6.5.2     | Components in protective earthing conductors and protective bonding conductors  | No such components.  | N/A     |
| 2.6.5.3     | Disconnection of protective earth   | Disconnection of PE removes all hazards.   | P       |
| 2.6.5.4     | Parts that can be removed by an operator  | Detachable power supply cord and appliance inlet meet make/break criteria.                                 | P       |



| IEC 60950-1 |  |  |         |
|-------------|--|--|---------|
| Clause      | Requirement + Test   | Result - Remark                          | Verdict |
| 2.6.5.5     | Parts removed during servicing                                     | Disconnection of PE removes all hazards. | P       |
| 2.6.5.6     | Corrosion resistance   | Evaluated.                               | P       |
| 2.6.5.7     | Screws for protective bonding                                      | No protective bonding screws provided.   | N/A     |
| 2.6.5.8     | Reliance on telecommunication network or cable distribution system | No TNV or CDS circuits.                  | N/A     |

| 2.7   | Overcurrent and earth fault protection in primary circuits   |  | P   |
|-------|--|--|-----|
| 2.7.1 | Basic requirements   | Provided by the building installation. | P   |
|       | Instructions when protection relies on building installation | Pluggable type A equipment.            | N/A |
| 2.7.2 | Faults not simulated in 5.3.7                                | Considered.                            | N/A |
| 2.7.3 | Short-circuit backup protection                              | Provided by the building installation. | N/A |
| 2.7.4 | Number and location of protective devices .....              | Provided by the building installation  | N/A |
| 2.7.5 | Protection by several devices                                | Provided by the building installation  | N/A |
| 2.7.6 | Warning to service personnel .....                           | Provided by the building installation  | N/A |

| 2.8     | Safety interlocks   |  | N/A |
|---------|---|--|-----|
| 2.8.1   | General principles  | No safety interlocks provided or required. | N/A |
| 2.8.2   | Protection requirements   |  | N/A |
| 2.8.3   | Inadvertent reactivation  |  | N/A |
| 2.8.4   | Fail-safe operation   |  | N/A |
|         | Protection against extreme hazard   |  | N/A |
| 2.8.5   | Moving parts  |  | N/A |
| 2.8.6   | Overriding  |  | N/A |
| 2.8.7   | Switches, relays and their related circuits                                 |  | N/A |
| 2.8.7.1 | Separation distances for contact gaps and their related circuits (mm) ..... |  | N/A |
| 2.8.7.2 | Overload test   |  | N/A |
| 2.8.7.3 | Endurance test  |  | N/A |
| 2.8.7.4 | Electric strength test  | (see appended table 5.2)                   | N/A |
| 2.8.8   | Mechanical actuators  |  | N/A |

| 2.9 | Electrical insulation | P |
|-----|-----------------------|---|
|-----|-----------------------|---|

| IEC 60950-1 |   |   |         |
|-------------|---|---|---------|
| Clause      | Requirement + Test                            | Result - Remark   | Verdict |
| 2.9.1       | Properties of insulating materials            | Neither natural rubber, materials containing asbestos nor hygroscopic materials are used as insulation. | P       |
| 2.9.2       | Humidity conditioning                         | Certified power supplies used.  | N/A     |
|             | Relative humidity (%), temperature (°C) ..... |   | —       |
| 2.9.3       | Grade of insulation                           | Only BI evaluated.  | P       |
| 2.9.4       | Separation from hazardous voltages            | Reinforced insulation provided by certified power supply.   | N/A     |
|             | Method(s) used .....                          |   | —       |

| 2.10     | Clearances, creepage distances and distances through insulation |  | P   |
|----------|---|--|-----|
| 2.10.1   | General   | All distances within the PSU evaluated as part of separately certified power supply. Only BI evaluated from Mains to PE in terminal block. | P   |
| 2.10.1.1 | Frequency .....   | 50/60Hz  | N/A |
| 2.10.1.2 | Pollution degrees .....   | 2  | N/A |
| 2.10.1.3 | Reduced values for functional insulation                        | No reduced values for functional insulation.   | N/A |
| 2.10.1.4 | Intervening unconnected conductive parts                        | No such parts.   | N/A |
| 2.10.1.5 | Insulation with varying dimensions                              | None used.   | N/A |
| 2.10.1.6 | Special separation requirements                                 |  | N/A |
| 2.10.1.7 | Insulation in circuits generating starting pulses               | None used.   | N/A |
| 2.10.2   | Determination of working voltage                                | Part of certified power supply.  | N/A |
| 2.10.2.1 | General   |  | —   |
| 2.10.2.2 | RMS working voltage   | Used input rating 120V.  | —   |
| 2.10.2.3 | Peak working voltage  | Used input rating 170V.  | —   |
| 2.10.3   | Clearances  | All distances within the PSU evaluated as part of separately certified power supply. Only BI evaluated from Mains to PE in terminal block. | —   |
| 2.10.3.1 | General   |  | —   |
| 2.10.3.2 | Mains transient voltages  | Not measured.  | N/A |
|          | a) AC mains supply .....  | Used input rating 120VAC.  | —   |
|          | b) Earthed d.c. mains supplies .....                            | No dc mains.   | N/A |
|          | c) Unearthed d.c. mains supplies .....                          | No dc mains.   | N/A |
|          | d) Battery operation .....                                      | No batteries.  | N/A |

| IEC 60950-1 |   |   |         |
|-------------|---|---|---------|
| Clause      | Requirement + Test  | Result - Remark   | Verdict |
| 2.10.3.3    | Clearances in primary circuits  | All distances within the PSU evaluated as part of separately certified power supply. Only BI evaluated from Mains to PE in terminal block. (see appended table 2.10.3 and 2.10.4) | N/A     |
| 2.10.3.4    | Clearances in secondary circuits  | Only functional insulation in secondary circuits, ref. 5.3.4.   | N/A     |
| 2.10.3.5    | Clearances in circuits having starting pulses                                   | (see appended table 2.10.3 and 2.10.4)  | N/A     |
| 2.10.3.6    | Transients from a.c. mains supply .....   | Use 1500Vp.   | —       |
| 2.10.3.7    | Transients from d.c. mains supply .....   | No dc mains.  | N/A     |
| 2.10.3.8    | Transients from telecommunication networks and cable distribution systems ..... | No TNV or CDS circuits.   | N/A     |
| 2.10.3.9    | Measurement of transient voltage levels   | Measurement not relevant.   | N/A     |
|             | a) Transients from a mains supply   |   | N/A     |
|             | For an a.c. mains supply .....  |   | N/A     |
|             | For a d.c. mains supply .....   |   | N/A     |
|             | b) Transients from a telecommunication network :                                |   | N/A     |
| 2.10.4      | Creepage distances  | All distances within the PSU evaluated as part of separately certified power supply. Only BI evaluated from Mains to PE in terminal block.  | —       |
| 2.10.4.1    | General   |   | —       |
| 2.10.4.2    | Material group and comparative tracking index                                   |   | N/A     |
|             | CTI tests .....   |   | —       |
| 2.10.4.3    | Minimum creepage distances  | All distances within the PSU evaluated as part of separately certified power supply. Only BI evaluated from Mains to PE in terminal block. (see appended table 2.10.3 and 2.10.4) | N/A     |
| 2.10.5      | Solid insulation  | Part of power supply certifications.  | N/A     |
| 2.10.5.1    | General   |   | —       |
| 2.10.5.2    | Distances through insulation  |   | N/A     |
| 2.10.5.3    | Insulating compound as solid insulation   |   | N/A     |
| 2.10.5.4    | Semiconductor devices   |   | N/A     |
| 2.10.5.5    | Cemented joints   |   | N/A     |
| 2.10.5.6    | Thin sheet material – General   |   | N/A     |

| IEC 60950-1 |   |                                 |         |
|-------------|---|---------------------------------|---------|
| Clause      | Requirement + Test  | Result - Remark                 | Verdict |
| 2.10.5.7    | Separable thin sheet material   |                                 | N/A     |
|             | Number of layers (pcs)..... :   |                                 | —       |
| 2.10.5.8    | Non-separable thin sheet material   |                                 | N/A     |
| 2.10.5.9    | Thin sheet material – standard test procedure                                   |                                 | N/A     |
|             | Electric strength test  |                                 | —       |
| 2.10.5.10   | Thin sheet material – alternative test procedure                                |                                 | N/A     |
|             | Electric strength test  |                                 | —       |
| 2.10.5.11   | Insulation in wound components  |                                 | N/A     |
| 2.10.5.12   | Wire in wound components  |                                 | N/A     |
|             | Working voltage .....   |                                 | N/A     |
|             | a) Basic insulation not under stress .....                                      |                                 | N/A     |
|             | b) Basic, supplementary, reinforced insulation .....                            |                                 | N/A     |
|             | c) Compliance with Annex U .....  |                                 | N/A     |
|             | Two wires in contact inside wound component;<br>angle between 45° and 90° ..... |                                 | N/A     |
| 2.10.5.13   | Wire with solvent-based enamel in wound components                              |                                 | N/A     |
|             | Electric strength test  |                                 | —       |
|             | Routine test  |                                 | N/A     |
| 2.10.5.14   | Additional insulation in wound components                                       |                                 | N/A     |
|             | Working voltage .....   |                                 | N/A     |
|             | - Basic insulation not under stress .....                                       |                                 | N/A     |
|             | - Supplementary, reinforced insulation .....                                    |                                 | N/A     |
| 2.10.6      | Construction of printed boards  | Part of certified power supply. | N/A     |
| 2.10.6.1    | Uncoated printed boards   |                                 | N/A     |
| 2.10.6.2    | Coated printed boards   |                                 | N/A     |
| 2.10.6.3    | Insulation between conductors on the same inner surface of a printed board      |                                 | N/A     |
| 2.10.6.4    | Insulation between conductors on different layers of a printed board            |                                 | N/A     |
|             | Distance through insulation   |                                 | N/A     |
|             | Number of insulation layers (pcs)..... :  |                                 | N/A     |
| 2.10.7      | Component external terminations   | Part of certified power supply. | N/A     |
| 2.10.8      | Tests on coated printed boards and coated components                            | Part of certified power supply. | N/A     |
| 2.10.8.1    | Sample preparation and preliminary inspection                                   |                                 | N/A     |
| 2.10.8.2    | Thermal conditioning  |                                 | N/A     |
| 2.10.8.3    | Electric strength test  |                                 | N/A     |

| IEC 60950-1 |   |                 |         |
|-------------|---|-----------------|---------|
| Clause      | Requirement + Test  | Result - Remark | Verdict |
| 2.10.8.4    | Abrasion resistance test  |                 | N/A     |
| 2.10.9      | Thermal cycling   |                 | N/A     |
| 2.10.10     | Test for Pollution Degree 1 environment and insulating compound |                 | N/A     |
| 2.10.11     | Tests for semiconductor devices and cemented joints             |                 | N/A     |
| 2.10.12     | Enclosed and sealed parts                                       |                 | N/A     |

|            |  |  |     |
|------------|--|--|-----|
| <b>3</b>   | <b>WIRING, CONNECTIONS AND SUPPLY</b>          |  | P   |
| <b>3.1</b> | <b>General</b>                                 |  | P   |
| 3.1.1      | Current rating and overcurrent protection      | Adequate for loads.  | P   |
| 3.1.2      | Protection against mechanical damage           | All internal wires are properly routed and away from sharp edges.              | P   |
| 3.1.3      | Securing of internal wiring                    | Internal wires are properly secured.   | P   |
| 3.1.4      | Insulation of conductors                       | Wiring insulation appropriate based on voltages. (see appended table 5.2)      | P   |
| 3.1.5      | Beads and ceramic insulators                   | None used.   | N/A |
| 3.1.6      | Screws for electrical contact pressure         | None used.   | N/A |
| 3.1.7      | Insulating materials in electrical connections | None used.   | N/A |
| 3.1.8      | Self-tapping and spaced thread screws          | Thread-cutting or space thread screws are not used for electrical connections. | N/A |
| 3.1.9      | Termination of conductors                      | Wiring properly secured based on voltages.                                     | P   |
|            | 10 N pull test                                 | Reliable connectors/terminals used.  | N/A |
| 3.1.10     | Sleeving on wiring                             | None used.   | N/A |

|            |                                     |  |     |
|------------|-------------------------------------|--|-----|
| <b>3.2</b> | <b>Connection to a mains supply</b> |  | P   |
| 3.2.1      | Means of connection                 | Refer below:   | P   |
| 3.2.1.1    | Connection to an a.c. mains supply  | Provided with appliance inlet.                                       | P   |
| 3.2.1.2    | Connection to a d.c. mains supply   | The equipment is not for connection to a d.c. mains supply.          | N/A |
| 3.2.2      | Multiple supply connections         | Only one supply connection.  | N/A |
| 3.2.3      | Permanently connected equipment     | The equipment is not intended for permanent connection to the mains. | N/A |

| IEC 60950-1 |   |   |         |
|-------------|---|---|---------|
| Clause      | Requirement + Test  | Result - Remark   | Verdict |
|             | Number of conductors, diameter of cable and conduits (mm) .....       |   | —       |
| 3.2.4       | Appliance inlets  | The appliance inlet complies with IEC 60320.                                  | P       |
| 3.2.5       | Power supply cords  | Refer below:  | N/A     |
| 3.2.5.1     | AC power supply cords   | Power supply cord is not evaluated with the equipment.                        | N/A     |
|             | Type .....  |   | —       |
|             | Rated current (A), cross-sectional area (mm <sup>2</sup> ), AWG ..... |   | —       |
| 3.2.5.2     | DC power supply cords   | The equipment is not for connection to a d.c. mains supply.                   | N/A     |
| 3.2.6       | Cord anchorages and strain relief                                     | Equipment provided with an appliance inlet.                                   | N/A     |
|             | Mass of equipment (kg), pull (N) .....                                |   | —       |
|             | Longitudinal displacement (mm) .....                                  |   | —       |
| 3.2.7       | Protection against mechanical damage                                  | Equipment provided with an appliance inlet.                                   | N/A     |
| 3.2.8       | Cord guards   | The equipment is neither hand-held nor intended to be moved during operation. | N/A     |
|             | Diameter or minor dimension D (mm); test mass (g) .....               |   | —       |
|             | Radius of curvature of cord (mm) .....                                |   | —       |
| 3.2.9       | Supply wiring space   | Equipment provided with an appliance inlet.                                   | N/A     |

|            |   |   |     |
|------------|---|---|-----|
| <b>3.3</b> | <b>Wiring terminals for connection of external conductors</b>                     |   | N/A |
| 3.3.1      | Wiring terminals  | Equipment provided with an appliance inlet. | N/A |
| 3.3.2      | Connection of non-detachable power supply cords                                   |   | N/A |
| 3.3.3      | Screw terminals   |   | N/A |
| 3.3.4      | Conductor sizes to be connected   |   | N/A |
|            | Rated current (A), cord/cable type, cross-sectional area (mm <sup>2</sup> ) ..... |   | —   |
| 3.3.5      | Wiring terminal sizes   |   | N/A |
|            | Rated current (A), type, nominal thread diameter (mm) .....                       |   | —   |
| 3.3.6      | Wiring terminal design  |   | N/A |
| 3.3.7      | Grouping of wiring terminals  |   | N/A |
| 3.3.8      | Stranded wire   |   | N/A |

| IEC 60950-1 |                    |                 |         |
|-------------|--------------------|-----------------|---------|
| Clause      | Requirement + Test | Result - Remark | Verdict |

|            |   |  |     |
|------------|---|--|-----|
| <b>3.4</b> | <b>Disconnection from the mains supply</b>        |  | N/A |
| 3.4.1      | General requirement                               | Equipment provided with an appliance inlet.                  | N/A |
| 3.4.2      | Disconnect devices                                | Refer below:   | N/A |
| 3.4.3      | Permanently connected equipment                   | The appliance inlet is considered the disconnect device.     | N/A |
| 3.4.4      | Parts which remain energized                      | Not permanently connected equipment.                         | N/A |
| 3.4.5      | Switches in flexible cords                        | No switches in flexible cords.                               | N/A |
| 3.4.6      | Number of poles - single-phase and d.c. equipment | Power supply cord is not evaluated with the equipment.       | P   |
| 3.4.7      | Number of poles - three-phase equipment           | The disconnect device disconnects both poles simultaneously. | N/A |
| 3.4.8      | Switches as disconnect devices                    | Single-phase equipment.                                      | N/A |
| 3.4.9      | Plugs as disconnect devices                       | Operator's Guide provided.                                   | P   |
| 3.4.10     | Interconnected equipment                          | Only one supply source.                                      | N/A |
| 3.4.11     | Multiple power sources                            | Only one supply source.                                      | N/A |

|            |  |   |     |
|------------|--|---|-----|
| <b>3.5</b> | <b>Interconnection of equipment</b>      |   | P   |
| 3.5.1      | General requirements                     |   | —   |
| 3.5.2      | Types of interconnection circuits .....  | SELV to SELV.                           | P   |
| 3.5.3      | ELV circuits as interconnection circuits | None.                                   | N/A |
| 3.5.4      | Data ports for additional equipment      | No data ports for additional equipment. | N/A |

|            |                              |   |   |
|------------|------------------------------|---|---|
| <b>4</b>   | <b>PHYSICAL REQUIREMENTS</b> |   | P |
| <b>4.1</b> | <b>Stability</b>             |   | P |
|            | Angle of 10°                 | Complies (scanning unit and cart).  | P |
|            | Test force (N) .....         | Used 250N and 800N applied downward on side foldout work surface. No hazards. | P |

|            |                            |  |     |
|------------|----------------------------|--|-----|
| <b>4.2</b> | <b>Mechanical strength</b> |  | P   |
| 4.2.1      | General                    |  | P   |
|            | Rack-mounted equipment.    | Not rack-mount equipment. (see Annex DD) | N/A |

| IEC 60950-1 |  |  |         |
|-------------|--|--|---------|
| Clause      | Requirement + Test                                   | Result - Remark                                    | Verdict |
| 4.2.2       | Steady force test, 10 N                              | Certified PSU used.                                | N/A     |
| 4.2.3       | Steady force test, 30 N                              | No internal enclosure barriers.                    | N/A     |
| 4.2.4       | Steady force test, 250 N                             | Complies.  | P       |
| 4.2.5       | Impact test  | Complet metal enclosure mm thickness.              | N/A     |
|             | Fall test  |  | N/A     |
|             | Swing test   |  | N/A     |
| 4.2.6       | Drop test; height (mm) ..... :                       | Drop test not applicable.                          | N/A     |
| 4.2.7       | Stress relief test                                   | Metal Enclosure.                                   | N/A     |
| 4.2.8       | Cathode ray tubes                                    | No CRT.  | N/A     |
|             | Picture tube separately certified ..... :            | (see separate test report or attached certificate) | N/A     |
| 4.2.9       | High pressure lamps                                  | No high pressure lamps.                            | N/A     |
| 4.2.10      | Wall or ceiling mounted equipment; force (N) ..... : | Not wall of ceiling mount.                         | N/A     |

|            |  |   |     |
|------------|--|---|-----|
| <b>4.3</b> | <b>Design and construction</b>                           |   | P   |
| 4.3.1      | Edges and corners  | All edges and corners are rounded and/or smoothed.          | P   |
| 4.3.2      | Handles and manual controls; force (N) ..... :           | None.   | N/A |
| 4.3.3      | Adjustable controls                                      | No hazardous adjustable controls.                           | N/A |
| 4.3.4      | Securing of parts  | Properly secured.   | P   |
| 4.3.5      | Connection by plugs and sockets                          | SELV connector does not comply with IEC 60320 or IEC 60083. | N/A |
| 4.3.6      | Direct plug-in equipment                                 | Not direct plug-in equipment.                               | N/A |
|            | Torque ..... :   |   | —   |
|            | Compliance with the relevant mains plug standard ..... : |   | N/A |
| 4.3.7      | Heating elements in earthed equipment                    | No heating elements provided.                               | N/A |
| 4.3.8      | Batteries  | No batteries. (see appended tables 4.3.8)                   | N/A |
|            | - Overcharging of a rechargeable battery                 |   | N/A |
|            | - Unintentional charging of a non-rechargeable battery   |   | N/A |
|            | - Reverse charging of a rechargeable battery             |   | N/A |
|            | - Excessive discharging rate for any battery             |   | N/A |
| 4.3.9      | Oil and grease   | Insulation is not exposed to oil, grease etc.               | N/A |



| IEC 60950-1 |   |  |          |
|-------------|---|--|----------|
| Clause      | Requirement + Test  | Result - Remark  | Verdict  |
| 4.3.10      | Dust, powders, liquids and gases  | The equipment does not generate ionizing radiation or use a laser, and does not contain flammable liquids or gases. Only a certified laser printer used. | N/A      |
| 4.3.11      | Containers for liquids or gases   | No containers for liquids or gases in the equipment.   | N/A      |
| 4.3.12      | Flammable liquids .....   | The equipment does not contain flammable liquid.   | N/A      |
|             | Quantity of liquid (l) .....  |  | N/A      |
|             | Flash point (°C) .....  |  | N/A      |
| 4.3.13      | Radiation   | No radiation.  | N/A      |
| 4.3.13.1    | General   |  | N/A      |
| 4.3.13.2    | Ionizing radiation  | The equipment does not generate ionizing radiation.  | N/A      |
|             | Measured radiation (pA/kg) .....  |  | —        |
|             | Measured high-voltage (kV) .....  |  | —        |
|             | Measured focus voltage (kV) .....                                       |  | —        |
|             | CRT markings .....  |  | —        |
| 4.3.13.3    | Effect of ultraviolet (UV) radiation on materials                       | The equipment does not produce UV radiation.   | N/A      |
|             | Part, property, retention after test, flammability classification ..... |  | N/A      |
| 4.3.13.4    | Human exposure to ultraviolet (UV) radiation .....                      | The equipment does not produce UV radiation.   | N/A      |
| 4.3.13.5    | Lasers (including laser diodes) and LEDs                                | No lasers, LED's provided are diffused. Only a certified laser printer used.   | N/A      |
| 4.3.13.5.1  | Lasers (including laser diodes)   | None.  | N/A      |
|             | Laser class .....   |  | —        |
| 4.3.13.5.2  | Light emitting diodes (LEDs)  | LED's provided are diffused indicating types only.   |          |
| 4.3.13.6    | Other types .....   | The equipment does not generate other types of radiation.  | N/A      |
| <b>4.4</b>  | <b>Protection against hazardous moving parts</b>                        |  | <b>P</b> |
| 4.4.1       | General   | Adequate protection against risk of personnel injury.  | P        |
| 4.4.2       | Protection in operator access areas .....                               | No hazardous moving parts accessible to the operator other than guarded fans.  | P        |

| IEC 60950-1 |  |   |         |
|-------------|--|---|---------|
| Clause      | Requirement + Test                                 | Result - Remark                             | Verdict |
|             | Household and home/office document/media shredders | (see Annex EE)                              | N/A     |
| 4.4.3       | Protection in restricted access locations .....    | Not intended for restricted access location | N/A     |
| 4.4.4       | Protection in service access areas                 | Adequate protection.                        | N/A     |
| 4.4.5       | Protection against moving fan blades               | Guarded fans                                | P       |
| 4.4.5.1     | General  |   | N/A     |
|             | Not considered to cause pain or injury. a).....:   |   | N/A     |
|             | Is considered to cause pain, not injury. b) .....  |   | N/A     |
|             | Considered to cause injury. c) .....               |   | N/A     |
| 4.4.5.2     | Protection for users                               |   | N/A     |
|             | Use of symbol or warning .....                     |   | N/A     |
| 4.4.5.3     | Protection for service persons                     |   | N/A     |
|             | Use of symbol or warning .....                     |   | N/A     |

|            |   |   |     |
|------------|---|---|-----|
| <b>4.5</b> | <b>Thermal requirements</b>             |   | P   |
| 4.5.1      | General                                 |   | P   |
| 4.5.2      | Temperature tests                       |   | P   |
|            | Normal load condition per Annex L ..... | Refer to Annex L.                           | —   |
| 4.5.3      | Temperature limits for materials        | Complies. (see appended table 4.5)          | P   |
| 4.5.4      | Touch temperature limits                | Complies. (see appended table 4.5)          | P   |
| 4.5.5      | Resistance to abnormal heat .....       | Certified components, no testing performed. | N/A |

|            |   |                               |     |
|------------|---|-------------------------------|-----|
| <b>4.6</b> | <b>Openings in enclosures</b>                     |                               | P   |
| 4.6.1      | Top and side openings                             | No openings in the enclosure. | N/A |
|            | Dimensions (mm) .....                             |                               | —   |
| 4.6.2      | Bottoms of fire enclosures                        | No bottom openings            | N/A |
|            | Construction of the bottom, dimensions (mm) ..:   |                               | —   |
| 4.6.3      | Doors or covers in fire enclosures                |                               | N/A |
| 4.6.4      | Openings in transportable equipment               | No openings in the enclosure. | N/A |
| 4.6.4.1    | Constructional design measures                    |                               | N/A |
|            | Dimensions (mm) .....                             |                               | —   |
| 4.6.4.2    | Evaluation measures for larger openings           |                               | N/A |
| 4.6.4.3    | Use of metallized parts                           |                               | N/A |
| 4.6.5      | Adhesives for constructional purposes             |                               | N/A |
|            | Conditioning temperature (°C), time (weeks).....: |                               | —   |

| IEC 60950-1 |                    |                 |         |
|-------------|--------------------|-----------------|---------|
| Clause      | Requirement + Test | Result - Remark | Verdict |

|            |  |  |     |
|------------|--|--|-----|
| <b>4.7</b> | <b>Resistance to fire</b>  |  | P   |
| 4.7.1      | Reducing the risk of ignition and spread of flame                      | Method 1 used.   | P   |
|            | Method 1, selection and application of components wiring and materials | Suitable materials used, refer to appended table 1.5.1. (see appended table 4.7)             | P   |
|            | Method 2, application of all of simulated fault condition tests        | Method 1 used.   | N/A |
| 4.7.2      | Conditions for a fire enclosure  | Refer below.   | —   |
| 4.7.2.1    | Parts requiring a fire enclosure                                       | The fire enclosure is required to cover all parts.   | P   |
| 4.7.2.2    | Parts not requiring a fire enclosure                                   |  | N/A |
| 4.7.3      | Materials  |  | —   |
| 4.7.3.1    | General  | Components and materials have adequate flammability classification. (see appended Table 4.7) | —   |
| 4.7.3.2    | Materials for fire enclosures  | Refer to enclosure in Table 1.5.1.   | P   |
| 4.7.3.3    | Materials for components and other parts outside fire enclosures       |  | N/A |
| 4.7.3.4    | Materials for components and other parts inside fire enclosures        | PWB flame rated 94V-0.   | P   |
| 4.7.3.5    | Materials for air filter assemblies                                    | No air filters.  | N/A |
| 4.7.3.6    | Materials used in high-voltage components                              | No high voltage components.  | N/A |

|            |  |                               |     |
|------------|--|-------------------------------|-----|
| <b>5</b>   | <b>ELECTRICAL REQUIREMENTS AND SIMULATED ABNORMAL CONDITIONS</b> |                               | P   |
| <b>5.1</b> | <b>Touch current and protective conductor current</b>            |                               | P   |
| 5.1.1      | General  |                               | P   |
| 5.1.2      | Configuration of equipment under test (EUT)                      | Only single connection.       | P   |
| 5.1.2.1    | Single connection to an a.c. mains supply                        | Only single connection.       | P   |
| 5.1.2.2    | Redundant multiple connections to an a.c. mains supply           | Only single connection.       | N/A |
| 5.1.2.3    | Simultaneous multiple connections to an a.c. mains supply        |                               | N/A |
| 5.1.3      | Test circuit   | Single phase type TN system.  | P   |
| 5.1.4      | Application of measuring instrument                              | Measuring circuit D1 used.    | P   |
| 5.1.5      | Test procedure   | Switch "e" opened and closed. | P   |
| 5.1.6      | Test measurements  | (see appended table 5.1)      | P   |
|            | Supply voltage (V) .....   | 127.2VAC/60Hz                 | —   |
|            | Measured touch current (mA) .....                                | 0.050                         | —   |
|            | Max. allowed touch current (mA) .....                            | 3.5                           | —   |

| IEC 60950-1 |   |  |         |
|-------------|---|--|---------|
| Clause      | Requirement + Test  | Result - Remark                                  | Verdict |
|             | Measured protective conductor current (mA) .....  | N/A  | —       |
|             | Max. allowed protective conductor current (mA)...   | N/A  | —       |
| 5.1.7       | Equipment with touch current exceeding 3,5 mA   |  | N/A     |
| 5.1.7.1     | General .....   |  | N/A     |
| 5.1.7.2     | Simultaneous multiple connections to the supply   |  | N/A     |
| 5.1.8       | Touch currents to telecommunication networks and cable distribution systems and from telecommunication networks | No TNV circuits.                                 | N/A     |
| 5.1.8.1     | Limitation of the touch current to a telecommunication network or to a cable distribution system                |  | N/A     |
|             | Supply voltage (V) .....  |  | —       |
|             | Measured touch current (mA) .....   |  | —       |
|             | Max. allowed touch current (mA) .....   |  | —       |
| 5.1.8.2     | Summation of touch currents from telecommunication networks   | No TNV circuits.                                 | N/A     |
|             | a) EUT with earthed telecommunication ports .....   |  | N/A     |
|             | b) EUT whose telecommunication ports have no reference to protective earth                                      |  | N/A     |
| <b>5.2</b>  | <b>Electric strength</b>  |  | P       |
| 5.2.1       | General   | Complies. (see appended table 5.2)               | P       |
| 5.2.2       | Test procedure  |  | P       |
| <b>5.3</b>  | <b>Abnormal operating and fault conditions</b>  |  | P       |
| 5.3.1       | Protection against overload and abnormal operation  | Locked rotor all fans. (see appended table 5.3)  | P       |
| 5.3.2       | Motors  | Only dc stepper motor and certified fans.        | N/A     |
| 5.3.3       | Transformers  | No transformers. (see appended Annex C)          | N/A     |
| 5.3.4       | Functional insulation.....  | No functional insulation relied upon for safety. | N/A     |
| 5.3.5       | Electromechanical components  | No such components.                              | N/A     |
| 5.3.6       | Audio amplifiers in ITE .....   | No audio amplifiers.                             | N/A     |
| 5.3.7       | Simulation of faults  |  | N/A     |
| 5.3.8       | Unattended equipment  |  | N/A     |
| 5.3.9       | Compliance criteria for abnormal operating and fault conditions   |  | N/A     |
| 5.3.9.1     | During the tests  |  | N/A     |

| IEC 60950-1 |                    |                 |         |
|-------------|--------------------|-----------------|---------|
| Clause      | Requirement + Test | Result - Remark | Verdict |
| 5.3.9.2     | After the tests    |                 | N/A     |

|            |  |                  |     |
|------------|--|------------------|-----|
| <b>6</b>   | <b>CONNECTION TO TELECOMMUNICATION NETWORKS</b>  |                  | N/A |
| <b>6.1</b> | <b>Protection of telecommunication network service persons, and users of other equipment connected to the network, from hazards in the equipment</b> |                  | N/A |
| 6.1.1      | Protection from hazardous voltages   |                  | N/A |
| 6.1.2      | Separation of the telecommunication network from earth   |                  | N/A |
| 6.1.2.1    | Requirements   | No TNV Circuits. | N/A |
|            | Supply voltage (V) .....   |                  | —   |
|            | Current in the test circuit (mA) .....   |                  | —   |
| 6.1.2.2    | Exclusions .....   |                  | N/A |

|            |  |                          |     |
|------------|--|--------------------------|-----|
| <b>6.2</b> | <b>Protection of equipment users from overvoltages on telecommunication networks</b> |                          | N/A |
| 6.2.1      | Separation requirements  | No TNV Circuits.         | N/A |
| 6.2.2      | Electric strength test procedure   |                          | N/A |
| 6.2.2.1    | Impulse test   | (see appended table 5.2) | N/A |
| 6.2.2.2    | Steady-state test  | (see appended table 5.2) | N/A |
| 6.2.2.3    | Compliance criteria  |                          | N/A |

|            |   |  |     |
|------------|---|--|-----|
| <b>6.3</b> | <b>Protection of the telecommunication wiring system from overheating</b> |  | N/A |
|            | Max. output current (A) .....   |  | —   |
|            | Current limiting method .....   |  | —   |

|            |   |                          |     |
|------------|---|--------------------------|-----|
| <b>7</b>   | <b>CONNECTION TO CABLE DISTRIBUTION SYSTEMS</b>   |                          | N/A |
| <b>7.1</b> | <b>General</b>  | No CDS                   | N/A |
| 7.2        | Protection of cable distribution system service persons, and users of other equipment connected to the system, from hazardous voltages in the equipment |                          | N/A |
| 7.3        | Protection of equipment users from overvoltages on the cable distribution system  |                          | N/A |
| 7.4        | Insulation between primary circuits and cable distribution systems  |                          | N/A |
| 7.4.1      | General   |                          | N/A |
| 7.4.2      | Voltage surge test  | (see appended table 5.2) | N/A |
| 7.4.3      | Impulse test  | (see appended table 5.2) | N/A |

| IEC 60950-1 |   |  |         |
|-------------|---|--|---------|
| Clause      | Requirement + Test  | Result - Remark  | Verdict |
| <b>A</b>    | <b>ANNEX A, TESTS FOR RESISTANCE TO HEAT AND FIRE</b>   |  | N/A     |
| <b>A.1</b>  | <b>Flammability test for fire enclosures of movable equipment having a total mass exceeding 18 kg, and of stationary equipment (see 4.7.3.2)</b>  | All materials have suitable flame class, no additional testing required. | N/A     |
| A.1.1       | Samples .....   |  | —       |
|             | Wall thickness (mm) .....   |  | —       |
| A.1.2       | Conditioning of samples; temperature (°C) .....   |  | N/A     |
| A.1.3       | Mounting of samples .....   |  | N/A     |
| A.1.4       | Test flame (see IEC 60695-11-3)   |  | N/A     |
|             | Flame A, B, C or D .....  |  | —       |
| A.1.5       | Test procedure  |  | N/A     |
| A.1.6       | Compliance criteria   |  | N/A     |
|             | Sample 1 burning time (s) .....   |  | —       |
|             | Sample 2 burning time (s) .....   |  | —       |
|             | Sample 3 burning time (s) .....   |  | —       |
| <b>A.2</b>  | <b>Flammability test for fire enclosures of movable equipment having a total mass not exceeding 18 kg, and for material and components located inside fire enclosures (see 4.7.3.2 and 4.7.3.4)</b> |  | N/A     |
| A.2.1       | Samples, material .....   |  | —       |
|             | Wall thickness (mm) .....   |  | —       |
| A.2.2       | Conditioning of samples; temperature (°C) .....   |  | N/A     |
| A.2.3       | Mounting of samples .....   |  | N/A     |
| A.2.4       | Test flame (see IEC 60695-11-4)   |  | N/A     |
|             | Flame A, B or C .....   |  | —       |
| A.2.5       | Test procedure  |  | N/A     |
| A.2.6       | Compliance criteria   |  | N/A     |
|             | Sample 1 burning time (s) .....   |  | —       |
|             | Sample 2 burning time (s) .....   |  | —       |
|             | Sample 3 burning time (s) .....   |  | —       |
| A.2.7       | Alternative test acc. to IEC 60695-11-5, cl. 5 and 9  |  | N/A     |
|             | Sample 1 burning time (s) .....   |  | —       |
|             | Sample 2 burning time (s) .....   |  | —       |
|             | Sample 3 burning time (s) .....   |  | —       |
| <b>A.3</b>  | <b>Hot flaming oil test (see 4.6.2)</b>   |  | N/A     |
| A.3.1       | Mounting of samples   |  | N/A     |
| A.3.2       | Test procedure  |  | N/A     |
| A.3.3       | Compliance criterion  |  | N/A     |

| IEC 60950-1 |   |   |         |
|-------------|---|---|---------|
| Clause      | Requirement + Test  | Result - Remark                           | Verdict |
| <b>B</b>    | <b>ANNEX B, MOTOR TESTS UNDER ABNORMAL CONDITIONS (see 4.7.2.2 and 5.3.2)</b> |   | N/A     |
| <b>B.1</b>  | <b>General requirements</b>   | Only dc stepper motor and certified fans. | N/A     |
|             | Position .....  |   | —       |
|             | Manufacturer .....  |   | —       |
|             | Type .....  |   | —       |
|             | Rated values .....  |   | —       |
| <b>B.2</b>  | <b>Test conditions</b>  |   | N/A     |
| <b>B.3</b>  | <b>Maximum temperatures</b>   | (see appended table 5.3)                  | N/A     |
| <b>B.4</b>  | <b>Running overload test</b>  | (see appended table 5.3)                  | N/A     |
| <b>B.5</b>  | <b>Locked-rotor overload test</b>   |   | N/A     |
|             | Test duration (days) .....  |   | —       |
|             | Electric strength test: test voltage (V) .....                                |   | —       |
| <b>B.6</b>  | <b>Running overload test for d.c. motors in secondary circuits</b>            |   | N/A     |
| B.6.1       | General   |   | N/A     |
| B.6.2       | Test procedure  |   | N/A     |
| B.6.3       | Alternative test procedure  |   | N/A     |
| B.6.4       | Electric strength test; test voltage (V) .....                                |   | N/A     |
| <b>B.7</b>  | <b>Locked-rotor overload test for d.c. motors in secondary circuits</b>       | DC stepper motor only in printer.         | N/A     |
| B.7.1       | General   |   | N/A     |
| B.7.2       | Test procedure  |   | N/A     |
| B.7.3       | Alternative test procedure  |   | N/A     |
| B.7.4       | Electric strength test; test voltage (V) .....                                |   | N/A     |
| <b>B.8</b>  | <b>Test for motors with capacitors</b>  | (see appended table 5.3)                  | N/A     |
| <b>B.9</b>  | <b>Test for three-phase motors</b>  | (see appended table 5.3)                  | N/A     |
| <b>B.10</b> | <b>Test for series motors</b>   |   | N/A     |
|             | Operating voltage (V) .....   |   | —       |
| <b>C</b>    | <b>ANNEX C, TRANSFORMERS (see 1.5.4 and 5.3.3)</b>                            |   | N/A     |
|             | Position .....  | No transformers.                          | —       |
|             | Manufacturer .....  |   | —       |
|             | Type .....  |   | —       |
|             | Rated values .....  |   | —       |
|             | Method of protection .....  |   | —       |
| <b>C.1</b>  | <b>Overload test</b>  | (see appended table 5.3)                  | N/A     |

| IEC 60950-1 |   |                                  |         |
|-------------|---|----------------------------------|---------|
| Clause      | Requirement + Test  | Result - Remark                  | Verdict |
| <b>C.2</b>  | <b>Insulation</b>   | (see appended tables 5.2 and C2) | N/A     |
|             | Protection from displacement of windings .....  |                                  | N/A     |
| <b>D</b>    | <b>ANNEX D, MEASURING INSTRUMENTS FOR TOUCH-CURRENT TESTS (see 5.1.4)</b>               |                                  | P       |
| <b>D.1</b>  | <b>Measuring instrument</b>   | Measuring circuit D1 used.       | P       |
| <b>D.2</b>  | <b>Alternative measuring instrument</b>   |                                  | N/A     |
| <b>E</b>    | <b>ANNEX E, TEMPERATURE RISE OF A WINDING (see 1.4.13)</b>                              |                                  | N/A     |
| <b>F</b>    | <b>ANNEX F, MEASUREMENT OF CLEARANCES AND CREEPAGE DISTANCES (see 2.10 and Annex G)</b> |                                  | N/A     |
| <b>G</b>    | <b>ANNEX G, ALTERNATIVE METHOD FOR DETERMINING MINIMUM CLEARANCES</b>                   |                                  | N/A     |
| <b>G.1</b>  | <b>Clearances</b>   | Annex G not relied upon.         | N/A     |
| G.1.1       | General   |                                  | N/A     |
| G.1.2       | Summary of the procedure for determining minimum clearances                             |                                  | N/A     |
| <b>G.2</b>  | <b>Determination of mains transient voltage (V)</b>                                     |                                  | N/A     |
| G.2.1       | AC mains supply .....   |                                  | N/A     |
| G.2.2       | Earthed d.c. mains supplies .....   |                                  | N/A     |
| G.2.3       | Unearthed d.c. mains supplies .....   |                                  | N/A     |
| G.2.4       | Battery operation .....   |                                  | N/A     |
| <b>G.3</b>  | <b>Determination of telecommunication network transient voltage (V) .....</b>           |                                  | N/A     |
| <b>G.4</b>  | <b>Determination of required withstand voltage (V)</b>                                  |                                  | N/A     |
| G.4.1       | Mains transients and internal repetitive peaks .....                                    |                                  | N/A     |
| G.4.2       | Transients from telecommunication networks .....  |                                  | N/A     |
| G.4.3       | Combination of transients   |                                  | N/A     |
| G.4.4       | Transients from cable distribution systems  |                                  | N/A     |
| <b>G.5</b>  | <b>Measurement of transient voltages (V)</b>  |                                  | N/A     |
|             | a) Transients from a mains supply   |                                  | N/A     |
|             | For an a.c. mains supply  |                                  | N/A     |
|             | For a d.c. mains supply   |                                  | N/A     |
|             | b) Transients from a telecommunication network  |                                  | N/A     |
| <b>G.6</b>  | <b>Determination of minimum clearances .....</b>  |                                  | N/A     |



| IEC 60950-1 |  |   |         |
|-------------|--|---|---------|
| Clause      | Requirement + Test   | Result - Remark   | Verdict |
| <b>H</b>    | <b>ANNEX H, IONIZING RADIATION (see 4.3.13)</b>  |   | N/A     |
| <b>J</b>    | <b>ANNEX J, TABLE OF ELECTROCHEMICAL POTENTIALS (see 2.6.5.6)</b>  |   | N/A     |
|             | Metal(s) used .....  | Corrosion not critical.   | —       |
| <b>K</b>    | <b>ANNEX K, THERMAL CONTROLS (see 1.5.3 and 5.3.8)</b>   |   | N/A     |
| K.1         | Making and breaking capacity   | No thermal controls relied upon for safety unless part of certified components.   | N/A     |
| K.2         | Thermostat reliability; operating voltage (V) .....  |   | N/A     |
| K.3         | Thermostat endurance test; operating voltage (V) .....   |   | N/A     |
| K.4         | Temperature limiter endurance; operating voltage (V) .....   |   | N/A     |
| K.5         | Thermal cut-out reliability  |   | N/A     |
| K.6         | Stability of operation   | (see appended table 5.3)  | N/A     |
| <b>L</b>    | <b>ANNEX L, NORMAL LOAD CONDITIONS FOR SOME TYPES OF ELECTRICAL BUSINESS EQUIPMENT (see 1.2.2.1 and 4.5.2)</b> |   | P       |
| L.1         | Typewriters  |   | N/A     |
| L.2         | Adding machines and cash registers   |   | N/A     |
| L.3         | Erasers  |   | N/A     |
| L.4         | Pencil sharpeners  |   | N/A     |
| L.5         | Duplicators and copy machines  |   | N/A     |
| L.6         | Motor-operated files   |   | N/A     |
| L.7         | Other business equipment   | (MNL): Unit cannot scan ballots and print from the laser printer at the same time. The laser printer and the scan equipment are plugged into the UPS outlets. Max input current draw on the UPS input is with the laser printer printing. The UPS current rating is 12A. Scanning ballots is the worst case load for the DS450 central count scanner and tabulator. | P       |
| <b>M</b>    | <b>ANNEX M, CRITERIA FOR TELEPHONE RINGING SIGNALS (see 2.3.1)</b>   |   | N/A     |
| M.1         | Introduction   | No TNV circuits.  | N/A     |
| M.2         | Method A   |   | N/A     |
| M.3         | Method B   |   | N/A     |

| IEC 60950-1 |  |  |         |
|-------------|--|--|---------|
| Clause      | Requirement + Test   | Result - Remark                        | Verdict |
| M.3.1       | Ringling signal  |  | N/A     |
| M.3.1.1     | Frequency (Hz) .....   |  | —       |
| M.3.1.2     | Voltage (V) .....  |  | —       |
| M.3.1.3     | Cadence; time (s), voltage (V) .....   |  | —       |
| M.3.1.4     | Single fault current (mA) .....  |  | —       |
| M.3.2       | Tripping device and monitoring voltage .....   |  | N/A     |
| M.3.2.1     | Conditions for use of a tripping device or a monitoring voltage  |  | N/A     |
| M.3.2.2     | Tripping device  |  | N/A     |
| M.3.2.3     | Monitoring voltage (V) .....   |  | N/A     |
| <b>N</b>    | <b>ANNEX N, IMPULSE TEST GENERATORS (see 1.5.7.2, 1.5.7.3, 2.10.3.9, 6.2.2.1, 7.3.2, 7.4.3 and Clause G.5)</b> |  | N/A     |
| N.1         | ITU-T impulse test generators  | Impulse Test not relied upon.          | N/A     |
| N.2         | IEC 60065 impulse test generator   |  | N/A     |
| <b>P</b>    | <b>ANNEX P, NORMATIVE REFERENCES</b>   |  | —       |
| <b>Q</b>    | <b>ANNEX Q, Voltage dependent resistors (VDRs) (see 1.5.9.1)</b>   |  | N/A     |
|             | - Preferred climatic categories .....  | No VDR's.                              | N/A     |
|             | - Maximum continuous voltage .....   |  | N/A     |
|             | - Combination pulse current .....  |  | N/A     |
|             | Body of the VDR<br>Test according to IEC60695-11-5.....  |  | N/A     |
|             | Body of the VDR.<br>Flammability class of material ( min V-1).....   |  | N/A     |
| <b>R</b>    | <b>ANNEX R, EXAMPLES OF REQUIREMENTS FOR QUALITY CONTROL PROGRAMMES</b>  |  | N/A     |
| R.1         | Minimum separation distances for unpopulated coated printed boards (see 2.10.6.2)                              | Coated PWB not relied upon for safety. | N/A     |
| R.2         | Reduced clearances (see 2.10.3)  |  | N/A     |
| <b>S</b>    | <b>ANNEX S, PROCEDURE FOR IMPULSE TESTING (see 6.2.2.3)</b>  |  | N/A     |
| S.1         | Test equipment   | Impulse not relied upon.               | N/A     |
| S.2         | Test procedure   |  | N/A     |
| S.3         | Examples of waveforms during impulse testing   |  | N/A     |

| IEC 60950-1 |   |                                |         |
|-------------|---|--------------------------------|---------|
| Clause      | Requirement + Test  | Result - Remark                | Verdict |
| <b>T</b>    | <b>ANNEX T, GUIDANCE ON PROTECTION AGAINST INGRESS OF WATER (see 1.1.2)</b>                   |                                | N/A     |
|             |   | No ingress protection claimed. | —       |
| <b>U</b>    | <b>ANNEX U, INSULATED WINDING WIRES FOR USE WITHOUT INTERLEAVED INSULATION (see 2.10.5.4)</b> |                                | N/A     |
|             |   | Annex U not relied upon.       | —       |
| <b>V</b>    | <b>ANNEX V, AC POWER DISTRIBUTION SYSTEMS (see 1.6.1)</b>                                     |                                | P       |
| V.1         | Introduction  |                                | P       |
| V.2         | TN power distribution systems   | TN.                            | P       |
| <b>W</b>    | <b>ANNEX W, SUMMATION OF TOUCH CURRENTS</b>   |                                | N/A     |
| W.1         | Touch current from electronic circuits  | No TNV circuits.               | N/A     |
| W.1.1       | Floating circuits   |                                | N/A     |
| W.1.2       | Earthed circuits  |                                | N/A     |
| W.2         | Interconnection of several equipments   |                                | N/A     |
| W.2.1       | Isolation   |                                | N/A     |
| W.2.2       | Common return, isolated from earth  |                                | N/A     |
| W.2.3       | Common return, connected to protective earth  |                                | N/A     |
| <b>X</b>    | <b>ANNEX X, MAXIMUM HEATING EFFECT IN TRANSFORMER TESTS (see clause C.1)</b>                  |                                | N/A     |
| X.1         | Determination of maximum input current  | No transformers.               | N/A     |
| X.2         | Overload test procedure   |                                | N/A     |
| <b>Y</b>    | <b>ANNEX Y, ULTRAVIOLET LIGHT CONDITIONING TEST (see 4.3.13.3)</b>                            |                                | N/A     |
| Y.1         | Test apparatus .....  | No UV.                         | N/A     |
| Y.2         | Mounting of test samples .....  |                                | N/A     |
| Y.3         | Carbon-arc light-exposure apparatus .....   |                                | N/A     |
| Y.4         | Xenon-arc light exposure apparatus .....  |                                | N/A     |
| <b>Z</b>    | <b>ANNEX Z, OVERVOLTAGE CATEGORIES (see 2.10.3.2 and Clause G.2)</b>                          |                                | N/A     |
| <b>AA</b>   | <b>ANNEX AA, MANDREL TEST (see 2.10.5.8)</b>  |                                | N/A     |
| <b>BB</b>   | <b>ANNEX BB, CHANGES IN THE SECOND EDITION</b>  |                                | —       |

| IEC 60950-1 |                    |                 |         |
|-------------|--------------------|-----------------|---------|
| Clause      | Requirement + Test | Result - Remark | Verdict |

| CC   | ANNEX CC, Evaluation of integrated circuit (IC) current limiters |                         | N/A |
|------|--|-------------------------|-----|
| CC.1 | General  | No IC current limiters. | N/A |
| CC.2 | Test program 1.....:   |                         | N/A |
| CC.3 | Test program 2.....:   |                         | N/A |
| CC.4 | Test program 3.....:   |                         | N/A |
| CC.5 | Compliance.....:   |                         | N/A |

| DD   | ANNEX DD, Requirements for the mounting means of rack-mounted equipment |                             | N/A |
|------|---|-----------------------------|-----|
| DD.1 | General   | Not rack mounted equipment. | N/A |
| DD.2 | Mechanical strength test, variable N.....:                              |                             | N/A |
| DD.3 | Mechanical strength test, 250N, including end stops.....:               |                             | N/A |
| DD.4 | Compliance.....:  |                             | N/A |

| EE   | ANNEX EE, Household and home/office document/media shredders                      |                 | N/A |
|------|---|-----------------|-----|
| EE.1 | General   | Not a shredder. | N/A |
| EE.2 | Markings and instructions   |                 | N/A |
|      | Use of markings or symbols.....:  |                 | N/A |
|      | Information of user instructions, maintenance and/or servicing instructions.....: |                 | N/A |
| EE.3 | Inadvertent reactivation test.....:   |                 | N/A |
| EE.4 | Disconnection of power to hazardous moving parts:                                 |                 | N/A |
|      | Use of markings or symbols.....:  |                 | N/A |
| EE.5 | Protection against hazardous moving parts   |                 | N/A |
|      | Test with test finger (Figure 2A).....:   |                 | N/A |
|      | Test with wedge probe (Figure EE1 and EE2).....:                                  |                 | N/A |

| IEC 60950-1 |                    |                 |         |
|-------------|--------------------|-----------------|---------|
| Clause      | Requirement + Test | Result - Remark | Verdict |

| 1.5.1   | TABLE: List of critical components |                              |  |                              |  | P |
|---|------------------------------------|------------------------------|--|------------------------------|--|---|
| Object/part No.   | Manufacturer/<br>trademark         | Type/model                   | Technical data   | Standard<br>(Edition / year) | Mark(s) of<br>conformity <sup>1)</sup> |   |
| Enclosure   | Various                            | Various                      | Metal, min. 2.0 mm thickness,  | UL 60950-1                   | Evaluated in<br>Equipment              |   |
| Cart  | Various                            | Various                      | Metal, 2.0mm thickness<br>overall provided with 4 locking<br>casters | UL 60950-1                   | Evaluated in<br>Equipment              |   |
| UPS   | APC                                | BR1500G                      | 120VAC, 50/60Hz, 12A   | UL 1778                      | cTUVRHus                               |   |
| Laser Printer   | Dell                               | S2810dn                      | 110-127V, 50/60Hz, 11A   | UL 60950-1                   | cTUVRHus                               |   |
| Dot Matrix Printer  | Oki Data Corp.                     | D22900A                      | 100-127VAC, 50/60Hz, 1.0A  | UL 60950-1                   | UL<br>E135780                          |   |
| AC Inlet/Filter/<br>Switch/Fuseholder                                       | Schurter                           | Type FKSP<br>(CD34.1101.15)1 | Rated 125/250V, 50/60Hz, 4A  | UL 1283                      | UL<br>E72928                           |   |
| Fuses (each pole)   | Cooper Bussman                     | Type MDA                     | Rated 250V, 4A   | UL 248-1                     | UL<br>E19180                           |   |
| Terminal Block  | Phoenix Contact                    | TYP ST 2.5                   | Rated 600V, 20A, 26-2 AWG.,<br>2.0A                                  | UL 508                       | UL<br>E60425                           |   |
| ATX Power Supply  | Systium Electronics<br>(FSP Group) | FSP220-60LE                  | Rated 100-240V, 4-2A, 60-<br>50Hz<br>Max. output 250W                | UL 60950-1                   | UL<br>E190414                          |   |
| Main Power Supply   | Astec                              | LPQ252                       | 100-250V, 50/60Hz, 4.5A  | UL 60950-1                   | UL                                     |   |
| Monitor   | TRU-Vu<br>(Vita Electronics)       | VT-150XAR1                   | Rated 12VDC, 2.0A  | UL 60950-1                   | UL<br>E147601                          |   |
| Stepper Motor   | Sanyo Denki                        | 103H7123-0440                | 3.2VDC, rated 2A   | UL 60950-1                   | Evaluated in<br>Equipment              |   |
| Side Fan  | Traco                              | D09T12HWS GN                 | Rated 12VDC, 0.23A   | UL 507                       | UL                                     |   |
| Top Internal Fan  | Traco                              | D04T12MWS GN                 | Rated 12VDC, 0.07A   | UL 507                       | UL                                     |   |
| Scanner Module<br>(Contact Type Image<br>Sensor)                            | Canon                              | HW12H-W02                    | LED, 1200dpi, 3.3V, 310mA  | UL 60950-1                   | Evaluated in<br>Equipment              |   |
| Mother Board  | Kontron                            | KTQM87/mitx                  | Rated 12VDC  | UL 60950-1                   | UL<br>E147705                          |   |
| Hard Drive  | Seagate                            | ST 1000NM0033                | Rated 5VDC, 0.75A;12VDC,<br>0.99A                                    | UL 60950-1                   | UL<br>E106814)                         |   |
| PWB   | Various                            | Various                      | Rated 94V-0, 105°C.  | UL94                         | UL                                     |   |
| Wiring  | Various                            | Various                      | AWM, rated min 125V, VW-1,<br>80°C, min. 18AWG.                      | UL 758                       | UL                                     |   |
| Supplementary information:  |                                    |                              |  |                              |  |   |
| 1) Provided evidence ensures the agreed level of compliance. See OD-CB2039. |                                    |                              |  |                              |  |   |

| IEC 60950-1 |                    |                 |         |
|-------------|--------------------|-----------------|---------|
| Clause      | Requirement + Test | Result - Remark | Verdict |

| 1.5.1   | TABLE: Opto Electronic Devices | N/A |
|---|--------------------------------|-----|
| Manufacturer .....  |                                |     |
| Type.....   |                                |     |
| Separately tested.....  |                                |     |
| Bridging insulation .....                                     |                                |     |
| External creepage distance .....                              |                                |     |
| Internal creepage distance .....                              |                                |     |
| Distance through insulation .....                             |                                |     |
| Tested under the following conditions .....                   |                                |     |
| Input.....  |                                |     |
| Output.....   |                                |     |
| supplementary information: : No opto electronic devices used. |                                |     |

| 1.6.2      | TABLE: Electrical data (in normal conditions) |            |       |        |           |                        | P |
|------------|---|------------|-------|--------|-----------|------------------------|---|
| U (V)      | I (A)   | Irated (A) | P (W) | Fuse # | Ifuse (A) | Condition/status       |   |
| 108/50HZ   | 9.50  | 12         | —     | —      | —         | Laser Printer Printing |   |
| 108/50HZ   | 1.64  | 12         | —     | —      | —         | Scanning Ballots       |   |
| 120/50HZ   | 10.00   | 12         | —     | —      | —         | Laser Printer Printing |   |
| 120/50HZ   | 1.50  | 12         | —     | —      | —         | Scanning Ballots       |   |
| 127.2/50HZ | 9.80  | 12         | —     | —      | —         | Laser Printer Printing |   |
| 127.2/50HZ | 1.45  | 12         | —     | —      | —         | Scanning Ballots       |   |
| 108/60HZ   | 8.70  | 12         | —     | —      | —         | Laser Printer Printing |   |
| 108/60HZ   | 1.69  | 12         | —     | —      | —         | Scanning Ballots       |   |
| 120/60HZ   | 9.10  | 12         | —     | —      | —         | Laser Printer Printing |   |
| 120/60HZ   | 1.50  | 12         | —     | —      | —         | Scanning Ballots       |   |
| 127.2/60HZ | 9.30  | 12         | —     | —      | —         | Laser Printer Printing |   |
| 127.2/60HZ | 1.44  | 12         | —     | —      | —         | Scanning Ballots       |   |

Supplementary information: MNL: Unit cannot scan ballots and print from the laser printer at the same time. The laser printer and the scan equipment are plugged into the UPS outlets. Max input current draw on the UPS input is with the laser printer printing. The UPS current rating is 12A. Scanning ballots is the worst case load for the DS450 central count scanner and tabulator.

| IEC 60950-1 |                    |                 |         |
|-------------|--------------------|-----------------|---------|
| Clause      | Requirement + Test | Result - Remark | Verdict |

| 2.1.1.5 c) 1)                                     | TABLE: max. V, A, VA test |                    |                    |                | N/A |
|---|---------------------------|--------------------|--------------------|----------------|-----|
| Voltage (rated) (V)                               | Current (rated) (A)       | Voltage (max.) (V) | Current (max.) (A) | VA (max.) (VA) |     |
|   |                           |                    |                    |                |     |
| supplementary information: Part of certified PSU. |                           |                    |                    |                |     |

| 2.1.1.5 c) 2)                                     | TABLE: stored energy |              |  | N/A |
|---|----------------------|--------------|--|-----|
| Capacitance C (μF)                                | Voltage U (V)        | Energy E (J) |  |     |
|   |                      |              |  |     |
| supplementary information: Part of certified PSU. |                      |              |  |     |

| 2.2   | TABLE: evaluation of voltage limiting components in SELV circuits |  |                             | N/A |
|---|---|--|-----------------------------|-----|
| Component (measured between)                        | max. voltage (V) (normal operation)                               |  | Voltage Limiting Components |     |
|   | V peak  | V d.c.   |                             |     |
|   |   |  |                             |     |
| Fault test performed on voltage limiting components |   | Voltage measured (V) in SELV circuits (V peak or V d.c.) |                             |     |
|   |   |  |                             |     |
| supplementary information: Part of certified PSU.   |   |  |                             |     |

| IEC 60950-1 |                    |                 |         |
|-------------|--------------------|-----------------|---------|
| Clause      | Requirement + Test | Result - Remark | Verdict |

|            |                                     |     |  |
|------------|-------------------------------------|-----|--|
| <b>2.5</b> | <b>TABLE: Limited power sources</b> | N/A |  |
|------------|-------------------------------------|-----|--|

Circuit output tested:

Note: Measured Uoc (V) with all load circuits disconnected:

| Components | Sample No. | Uoc (V) | I <sub>sc</sub> (A) |       | VA    |       |
|------------|------------|---------|---------------------|-------|-------|-------|
|            |            |         | Meas.               | Limit | Meas. | Limit |
|            |            |         |                     |       |       |       |
|            |            |         |                     |       |       |       |
|            |            |         |                     |       |       |       |
|            |            |         |                     |       |       |       |
|            |            |         |                     |       |       |       |

supplementary information: Part of certified PSU.

Sc=Short circuit, Oc=Open circuit

|               |   |     |  |
|---------------|---|-----|--|
| <b>2.10.2</b> | <b>Table: working voltage measurement</b> | N/A |  |
|---------------|---|-----|--|

| Location | RMS voltage (V) | Peak voltage (V) | Comments |
|----------|-----------------|------------------|----------|
|          |                 |                  |          |
|          |                 |                  |          |
|          |                 |                  |          |
|          |                 |                  |          |
|          |                 |                  |          |

supplementary information: Part of certified PSU.



| IEC 60950-1 |                    |                 |         |
|-------------|--------------------|-----------------|---------|
| Clause      | Requirement + Test | Result - Remark | Verdict |

| 2.10.3 and 2.10.4  | TABLE: Clearance and creepage distance measurements |              |                  |         |                  |         | P |
|--|---|--------------|------------------|---------|------------------|---------|---|
| Clearance (cl) and creepage distance (cr) at/of/between:   | U peak (V)  | U r.m.s. (V) | Required cl (mm) | cl (mm) | Required cr (mm) | cr (mm) |   |
| Functional:  |   |              |                  |         |                  |         |   |
|  |   |              |                  |         |                  |         |   |
| Basic/supplementary:   |   |              |                  |         |                  |         |   |
| AC Terminal Block (terminals L/N to PE)  | 170   | 120          | 1.0              | 6.5     | 1.5              | 6.5     |   |
|  |   |              |                  |         |                  |         |   |
| Reinforced:  |   |              |                  |         |                  |         |   |
|  |   |              |                  |         |                  |         |   |
| Supplementary information: Cl and Cr are part of power supply certification except for BI of terminal block. |   |              |                  |         |                  |         |   |

| 2.10.5  | TABLE: Distance through insulation measurements |           |                  |                   |          | N/A |
|---|---|-----------|------------------|-------------------|----------|-----|
| Distance through insulation (DTI) at/of:          | U peak (V)                                      | U rms (V) | Test voltage (V) | Required DTI (mm) | DTI (mm) |     |
|   |   |           |                  |                   |          |     |
|   |   |           |                  |                   |          |     |
| Supplementary information: Part of certified PSU. |   |           |                  |                   |          |     |

| IEC 60950-1 |                    |                 |         |
|-------------|--------------------|-----------------|---------|
| Clause      | Requirement + Test | Result - Remark | Verdict |

|              |                         |     |  |
|--------------|-------------------------|-----|--|
| <b>4.3.8</b> | <b>TABLE: Batteries</b> | N/A |  |
|--------------|-------------------------|-----|--|

The tests of 4.3.8 are applicable only when appropriate battery data is not available

Is it possible to install the battery in a reverse polarity position?

|                                      | Non-rechargeable batteries |               |                         | Rechargeable batteries |               |               |               |                   |               |
|--------------------------------------|----------------------------|---------------|-------------------------|------------------------|---------------|---------------|---------------|-------------------|---------------|
|                                      | Discharging                |               | Un-intentional charging | Charging               |               | Discharging   |               | Reversed charging |               |
|                                      | Meas. current              | Manuf. Specs. |                         | Meas. current          | Manuf. Specs. | Meas. current | Manuf. Specs. | Meas. current     | Manuf. Specs. |
| Max. current during normal condition |                            |               |                         |                        |               |               |               |                   |               |
| Max. current during fault condition  |                            |               |                         |                        |               |               |               |                   |               |

Test results:

- Chemical leaks

- Explosion of the battery

- Emission of flame or expulsion of molten metal

- Electric strength tests of equipment after completion of tests

Supplementary information: No batteries

| IEC 60950-1 |                    |                 |         |
|-------------|--------------------|-----------------|---------|
| Clause      | Requirement + Test | Result - Remark | Verdict |

|              |                         |     |  |
|--------------|-------------------------|-----|--|
| <b>4.3.8</b> | <b>TABLE: Batteries</b> | N/A |  |
|--------------|-------------------------|-----|--|

|   |
|---|
| Battery category..... : (Lithium, NiMh, NiCad, Lithium Ion ...)<br>Manufacturer ..... :<br>Type / model..... :<br>Voltage ..... :<br>Capacity..... : mAh<br>Tested and Certified by (incl. Ref. No.) ..... :<br>Circuit protection diagram: |
|---|



| MARKINGS AND INSTRUCTIONS (1.7.13)  |  |
|-------------------------------------|--|
| Location of replaceable battery     |  |
| Language(s) .....                   |  |
| Close to the battery .....          |  |
| In the servicing instructions ..... |  |
| In the operating instructions ..... |  |

| IEC 60950-1 |                    |                 |         |
|-------------|--------------------|-----------------|---------|
| Clause      | Requirement + Test | Result - Remark | Verdict |

| 4.5   | TABLE: Thermal requirements:                    |                     |                    |                     |                    | P                                   |                                  |                     |
|---|---|---------------------|--------------------|---------------------|--------------------|-------------------------------------|----------------------------------|---------------------|
|   | Supply voltage (V) .....                        | 108V/<br>50Hz       | 108V/<br>60Hz      | 127.2V/<br>60Hz     | 127.2V/<br>50Hz    | —                                   |                                  |                     |
|   | Ambient T <sub>min</sub> (°C) .....             | 25                  | 25                 | 25                  | 25                 | —                                   |                                  |                     |
|   | Ambient T <sub>max</sub> (°C) .....             | 25                  | 25                 | 25                  | 25                 | —                                   |                                  |                     |
|   | Maximum measured temperature T of part/at.....: | T (°C)              |                    |                     |                    | Allowed<br>T <sub>max</sub><br>(°C) |                                  |                     |
|   | Time for Stabilized Temperatures (hours)        | 1.5                 | 1.5                | 1.0                 | 1.0                | —                                   |                                  |                     |
|   | AC Inlet Filter Body                            | 30.2                | 29.8               | 29.4                | 28.7               | 60                                  |                                  |                     |
|   | Input Inductor Windings (Systium PSU)           | 39.6                | 39.1               | 38.4                | 37.6               | 90                                  |                                  |                     |
|   | Bulk Capacitor Body (Systium PSU)               | 39.1                | 38.6               | 38.1                | 37.3               | 85                                  |                                  |                     |
|   | Transformer (T1) Windings (Systium PSU)         | 42.9                | 42.4               | 41.9                | 41.2               | 90                                  |                                  |                     |
|   | Input Inductor Windings (Astec PSU)             | 31.0                | 30.7               | 30.2                | 29.9               | 90                                  |                                  |                     |
|   | Bulk (C9) Capacitor Body (Astec PSU)            | 31.6                | 31.2               | 30.9                | 30.5               | 85                                  |                                  |                     |
|   | Transformer (T1) Windings (Astec PSU)           | 36.7                | 36.5               | 36.2                | 35.8               | 90                                  |                                  |                     |
|   | Inductor (L8) Windings (Astec PSU)              | 32.2                | 31.9               | 31.6                | 31.3               | 90                                  |                                  |                     |
|   | Side Fan Case (Traco)                           | 29.6                | 29.3               | 29.0                | 28.7               | 90                                  |                                  |                     |
|   | Steeper Motor Case                              | 28.9                | 28.6               | 28.2                | 28.0               | 90                                  |                                  |                     |
|   | Monitor Enclosure (Plastic)                     | 28.7                | 28.3               | 22.8                | 27.9               | 95                                  |                                  |                     |
|   | Top of Enclosure Metal (Hot Spot)               | 28.5                | 28.4               | 28.2                | 27.7               | 70                                  |                                  |                     |
|   | Internal Ambient                                | 30.4                | 30.1               | 29.7                | 29.1               | reference                           |                                  |                     |
| Supplementary information: MNL was feeding paper ballots through scanner system. Filled ballot paper tray as needed for a continuous running process. |   |                     |                    |                     |                    |                                     |                                  |                     |
|   | Temperature T of winding:                       | t <sub>1</sub> (°C) | R <sub>1</sub> (Ω) | t <sub>2</sub> (°C) | R <sub>2</sub> (Ω) | T (°C)                              | Allowed<br>T <sub>max</sub> (°C) | Insulation<br>class |
|   |   |                     |                    |                     |                    |                                     |                                  |                     |
| Supplementary information: Transformer part of certified PSU.   |   |                     |                    |                     |                    |                                     |                                  |                     |

| IEC 60950-1 |                    |                 |         |
|-------------|--------------------|-----------------|---------|
| Clause      | Requirement + Test | Result - Remark | Verdict |

| 4.5.5   | TABLE: Ball pressure test of thermoplastic parts |                          | N/A |
|---|--|--------------------------|-----|
|   | Allowed impression diameter (mm) .....           | ≤ 2 mm                   | —   |
| Part  | Test temperature (°C)                            | Impression diameter (mm) |     |
|   |  |                          |     |
| Supplementary information: Part of certified PSU. |  |                          |     |

| 4.7                        | TABLE: Resistance to fire |                  |                        |                    |                         | P |
|----------------------------|---------------------------|------------------|------------------------|--------------------|-------------------------|---|
| Part                       | Manufacturer of material  | Type of material | Thickness (mm)         | Flammability class | Evidence                |   |
| Enclosure                  | Various                   | Metal            | Min. 2.0 mm thickness, | N/A                | Evaluated in equipment. |   |
| PWB                        | Various                   | Various          | Rated 105°C.           | Flame rated 94V-0. | Certified by UL         |   |
| Supplementary information: |                           |                  |                        |                    |                         |   |

| IEC 60950-1 |                    |                 |         |
|-------------|--------------------|-----------------|---------|
| Clause      | Requirement + Test | Result - Remark | Verdict |

| 5.1  | TABLE: touch current measurement |        |            |                                | P |
|--|----------------------------------|--------|------------|--------------------------------|---|
| Measured between:                                      | Measured (mA)                    |        | Limit (mA) | Comments/conditions            |   |
| P1 Normal (ON)   | 0.050                            | <0.005 | 3.5        | Only single supply connection. |   |
| P2 Reversed (ON)                                       | 0.050                            | <0.005 | 3.5        | Only single supply connection. |   |
| e Open   | x                                | —      | —          |                                |   |
| e Closed   | —                                | x      | —          |                                |   |
| P1 Normal (OFF)  | 0.005                            | <0.005 | 3.5        | Only single supply connection. |   |
| P1 Reversed (OFF)                                      | 0.005                            | <0.005 | 3.5        | Only single supply connection. |   |
| e Open   | x                                | —      | —          |                                |   |
| e Closed   | —                                | x      | —          |                                |   |
| supplementary information: Using measuring circuit D1. |                                  |        |            |                                |   |

| 5.2   | TABLE: Electric strength tests, impulse tests and voltage surge tests |                  |                    | P |
|---|---|------------------|--------------------|---|
| Test voltage applied between:                           | Voltage shape (AC, DC, impulse, surge)                                | Test voltage (V) | Breakdown Yes / No |   |
| Functional:   |   |                  |                    |   |
|   |   |                  |                    |   |
| Basic/supplementary:                                    |   |                  |                    |   |
| Mains to Ground (AC Inlet)                              | DC  | 1414             | No                 |   |
| Reinforced:   |   |                  |                    |   |
| L/N to external USB Connectors (for signal only)        | DC  | 2828             | No                 |   |
| Supplementary information: Certified UL power supplies. |   |                  |                    |   |

| IEC 60950-1 |                    |                 |         |
|-------------|--------------------|-----------------|---------|
| Clause      | Requirement + Test | Result - Remark | Verdict |

|            |   |          |   |
|------------|---|----------|---|
| <b>5.3</b> | <b>TABLE: Fault condition tests</b>                                 |          | P |
|            | Ambient temperature (°C) .....                                      | 24       | — |
|            | Power source for EUT: Manufacturer, model/type, output rating ..... | 90V/60Hz | — |

| Component No. | Fault             | Supply voltage (V) | Test time        | Fuse # | Fuse current (A) | Observation  |
|---------------|-------------------|--------------------|------------------|--------|------------------|--|
| DS450         | Fans locked rotor | 108                | 1 hour<br>8 min. | N/A    | N/A              | Using MNL. 108V/60Hz tested since it had the highest normal temperature results. The side, top, Astec PSU and System PSU fan rotors were locked. |

| TABLE: maximum temperatures |                              | Test      |  |  |  | P |
|-----------------------------|------------------------------|-----------|--|--|--|---|
|                             | test voltage (V) .....       | 108V/60Hz |  |  |  | — |
|                             | t <sub>amb1</sub> (°C) ..... | 25        |  |  |  | — |
|                             | t <sub>amb2</sub> (°C) ..... | 25        |  |  |  | — |

| Component: Fan Locked Rotor            | Maximum temperature T (°C) | allowed T <sub>max</sub> (°C) |
|--|----------------------------|-------------------------------|
| AC Inlet Filter Body                   | 32.4                       | No limit                      |
| Input Inductor Windings (System PSU)   | 43.8                       | 150                           |
| Bulk Capacitor Body (System PSU)       | 43.2                       | No limit                      |
| Transformer (T1) Windings (System PSU) | 46.1                       | 150                           |
| Input Inductor Windings (Astec PSU)    | 47.9                       | 150                           |
| Bulk (C9) Capacitor Body (Astec PSU)   | 81.2                       | No limit                      |
| Transformer (T1) Windings (Astec PSU)  | 78.4                       | 150                           |
| Inductor (L8) Windings (Astec PSU)     | 62.4                       | 150                           |
| Side Fan Case (Traco)                  | 36.4                       | 150                           |
| Steeper Motor Case                     | 34.7                       | 150                           |
| Top of Enclosure Metal (Hot Spot)      | 28.3                       | 70                            |

Supplementary information: Using MNL. 108V/60Hz tested since it had the highest normal temperature results. The side, top, Astec PSU and System PSU fan rotors were locked. Test ran for 1 hour and 8 minutes before UL certified power supply Astec shutted down. After cool down normal operation.

| IEC 60950-1 |                    |                 |         |
|-------------|--------------------|-----------------|---------|
| Clause      | Requirement + Test | Result - Remark | Verdict |

| C.2   | TABLE: transformers |                          |                         |                            |                         |                                 | N/A  |
|---|---------------------|--------------------------|-------------------------|----------------------------|-------------------------|---------------------------------|--|
| Loc.  | Tested insulation   | Working voltage peak / V | Working voltage rms / V | Required electric strength | Required clearance / mm | Required creepage distance / mm | Required distance thr. insul.                        |
|   |                     | (2.10.2)                 | (2.10.2)                | (5.2)                      | (2.10.3)                | (2.10.4)                        | (2.10.5)   |
|   |                     |                          |                         |                            |                         |                                 |  |
|   |                     |                          |                         |                            |                         |                                 |  |
|   |                     |                          |                         |                            |                         |                                 |  |
| Loc.  | Tested insulation   |                          |                         | Test voltage/ V            | Measured clearance / mm | Measured creepage dist./ mm     | Measured distance thr. insul. / mm; number of layers |
|   |                     |                          |                         |                            |                         |                                 |  |
|   |                     |                          |                         |                            |                         |                                 |  |
|   |                     |                          |                         |                            |                         |                                 |  |
|   |                     |                          |                         |                            |                         |                                 |  |
| supplementary information: Part of certified PSU. |                     |                          |                         |                            |                         |                                 |  |

| C.2         | TABLE: transformers | N/A |
|-------------|---------------------|-----|
| Transformer |                     |     |







# Attachment No.1

## ATTACHMENT TO TEST REPORT IEC 60950-1:2005 + A1:2009 + A2:2013 EUROPEAN GROUP DIFFERENCES

and

## NATIONAL DEVIATIONS

Information Technology Equipment – Safety –  
Part 1: General Requirements

Report Reference No.: 72120951-000

Dated of issue: 2016-10-18

**Explanation for Abbreviations** (if any differ from main report):

SAME as base report. 72120951-000

**Possible test case verdicts:**

- test case does not apply to the test object..... :  N/A /  N (Not Applicable)

- test object does meet the requirement..... : P (Pass)

- test object does not meet the requirement ..... : F (Fail)

**Remarks:**

Throughout this report a  comma /  point is used as the decimal separator.

**Attachment No.1**

Date: 2016-10-18

Page 2 of 15

Rpt. No.: 72120951-000

| <b>IEC 60950-1:2005 (ed.2)</b><br><b>(per IECEE CB Bulletin Website)</b> |  |                          |                        |
|--|--|--------------------------|------------------------|
| <b>Group</b>   | <b>Group standard references</b>                   | <b>Last modification</b> | <b>File downloaded</b> |
| CENELEC  | EN 60950-1:2006                                    | 2008-09-24               | X                      |
| CENELEC  | EN 60950-1:2006 + A11:2009                         | 2009-06-23               | X                      |
| CENELEC  | EN 60950-1:2006 + A11:2009 + A1:2010<br>+ A12:2011 | 2011-08-19               | X                      |
| CENELEC  | EN 60950-1:2006/A2:2013                            | 2013-09-03               | X                      |

| <b>IEC 60950-1:2005 (ed.2)</b><br><b>(per IECEE CB Bulletin Website)</b> |                                    |                           |                        |
|--|------------------------------------|---------------------------|------------------------|
| <b>Country</b>   | <b>National standard reference</b> | <b>Last modification*</b> | <b>File downloaded</b> |
| USA – US   | UL 60950-1, Second Edition         | 2007-08-08                | X                      |

| <b>IEC 60950-1:2005 (ed.2) + A1:2009 + A2:2013</b><br><b>(per IECEE CB Bulletin Website)</b> |                                    |                           |                        |
|--|------------------------------------|---------------------------|------------------------|
| <b>Country</b>   | <b>National standard reference</b> | <b>Last modification*</b> | <b>File downloaded</b> |
| <b>United States (USA) – US</b>  | <b>UL 60950-1 Am.1; Am.2</b>       | <b>2014-01-24</b>         | <b>X</b>               |

\* The last modified date indicates the last time the standard reference / attachment for this standard was modified.  
The date 2007-05-29 is the date the information was imported into the online CB Bulletin from the previous non-database version.

**Attachment No.1**

Date: 2016-10-18

Page 3 of 15

Rpt. No.: 72120951-000

|   |   |
|---|---|
| <b>ATTACHMENT TO TEST REPORT IEC 60950-1</b><br><b>EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES</b><br>Information technology equipment – Safety –<br>Part 1: General requirements |   |
| <b>Differences according to.....:</b>   | EN 60950-1:2006 + A11:2009 + A1:2010 + A12:2011 + A2:2013 |
| <b>Attachment Form No. ....:</b>  | EU_GD_IEC60950_1E   |
| <b>Attachment Originator .....</b>  | SGS Fimko Ltd   |
| <b>Master Attachment .....</b>  | Date 2013-09  |
| <b>Copyright © 2013 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.</b>                                    |   |

|   |
|---|
| <b>EN 60950-1:2006 + A11:2009 + A1:2010 + A12:2011 + A2:2013</b><br><b>– CENELEC COMMON MODIFICATIONS</b> |
|---|

| IEC 60950-1, GROUP DIFFERENCES (CENELEC common modifications EN) |  |                 |         |
|--|--|-----------------|---------|
| Clause   | Requirement + Test   | Result - Remark | Verdict |
|  | Clauses, subclauses, notes, tables and figures which are additional to those in IEC60950-1 and it's amendmets are prefixed "Z"   |                 | —       |
| Contents (A2:2013)   | Add the following annexes:<br>Annex ZA (normative)      Normative references to international publications with their corresponding European publications<br>Annex ZB (normative)      Special national conditions<br>Annex ZD (informative)      IEC and CENELEC code designations for flexible cords   |                 | —       |
| General  | Delete all the "country" notes in the reference document (IEC 60950-1:2005) according to the following list:<br>1.4.8    Note 2            1.5.1    Note 2 & 3            1.5.7.1    Note<br>1.5.8    Note 2            1.5.9.4    Note            1.7.2.1    Note 4, 5 & 6<br>2.2.3    Note            2.2.4    Note            2.3.2    Note<br>2.3.2.1    Note 2            2.3.4    Note 2            2.6.3.3    Note 2 & 3<br>2.7.1    Note            2.10.3.2    Note 2            2.10.5.13    Note 3<br>3.2.1.1    Note            3.2.4    Note 3.            2.5.1    Note 2<br>4.3.6    Note 1 & 2            4.7    Note 4            4.7.2.2    Note<br>4.7.3.1    Note 2            5.1.7.1    Note 3 & 4            5.3.7    Note 1<br>6    Note 2 & 5            6.1.2.1    Note 2            6.1.2.2    Note<br>6.2.2    Note            6.2.2.1    Note 2            6.2.2.2    Note<br>7.1    Note 3            7.2    Note            7.3    Note 1 & 2<br>G.2.1    Note 2            Annex H    Note 2 |                 | —       |
| General (A1:2010)  | Delete all the "country" notes in the reference document (IEC 60950-1:2005/A1:2010) according to the following list:<br>1.5.7.1    Note            6.1.2.1    Note 2<br>6.2.2.1    Note 2            EE.3    Note  |                 | —       |



**Attachment No.1**

Date: 2016-10-18

Page 4 of 15

Rpt. No.: 72120951-000

| <b>IEC 60950-1, GROUP DIFFERENCES (CENELEC common modifications EN)</b> |  |                              |         |
|---|--|------------------------------|---------|
| Clause  | Requirement + Test   | Result - Remark              | Verdict |
| General<br>(A2:2013)  | Delete all the "country" notes in the reference document (IEC 60950-1:2005/A2:2013) according to the following list:<br>2.7.1 Note *      2.10.3.1 Note 2<br>6.2.2. Note<br>* Note of secretary: Text of Common Modification remains unchanged.  |                              | P       |
| 1.1.1<br>(A1:2010)  | <b>Replace</b> the text of NOTE 3 by the following.<br>NOTE 3 The requirements of EN 60065 may also be used to meet safety requirements for multimedia equipment. See IEC Guide 112, Guide on the safety of multimedia equipment. For television sets EN 60065 applies.  |                              | P       |
| 1.3.Z1  | Add the following subclause:<br>1.3.Z1 Exposure to excessive sound pressure<br>The apparatus shall be so designed and constructed as to present no danger when used for its intended purpose, either in normal operating conditions or under fault conditions, particularly providing protection against exposure to excessive sound pressures from headphones or earphones.<br>NOTE Z1 A new method of measurement is described in EN 50332-1, Sound system equipment: Headphones and earphones associated with portable audio equipment - Maximum sound pressure level measurement methodology and limit considerations - Part 1: General method for "one package equipment", and in EN 50332-2, Sound system equipment: Headphones and earphones associated with portable audio equipment - Maximum sound pressure level measurement methodology and limit considerations - Part 2: Guidelines to associate sets with headphones coming from different manufacturers. | Not a portable sound system. | N/A     |
| (A12:2011)  | In EN 60950-1:2006/A12:2011<br>Delete the addition of 1.3.Z1 / EN 60950-1:2006<br>Delete the definition 1.2.3.Z1 / EN 60950-1:2006 /A1:2010  |                              | P       |
| 1.5.1<br><br>(Added info*)  | Add the following NOTE:<br>NOTE Z1 The use of certain substances in electrical and electronic equipment is restricted within the EU: see Directive 2002/95/EC.<br>New Directive 2011/65/11 *   |                              | P       |
| 1.7.2.1<br>(A1:2010)  | In addition, for a PORTABLE SOUND SYSTEM, the instructions shall include a warning that excessive sound pressure from earphones and headphones can cause hearing loss.   | Not a portable sound system. | N/A     |

**Attachment No.1**

Date: 2016-10-18

Page 5 of 15

Rpt. No.: 72120951-000

| <b>IEC 60950-1, GROUP DIFFERENCES (CENELEC common modifications EN)</b> |  |                              |         |
|---|--|------------------------------|---------|
| Clause  | Requirement + Test   | Result - Remark              | Verdict |
| 1.7.2.1<br>(A12:2011)   | In EN 60950-1:2006/A12:2011<br>Delete NOTE Z1 and the addition for Portable Sound System.<br>Add the following clause and annex to the existing standard and amendments.   | Not a portable sound system. | N/A     |
|   | <b>Zx Protection against excessive sound pressure from personal music players</b>  |                              |         |
|   | <b>Zx.1 General</b><br>This sub-clause specifies requirements for protection against excessive sound pressure from personal music players that are closely coupled to the ear. It also specifies requirements for earphones and headphones intended for use with personal music players.<br>A personal music player is a portable equipment for personal use, that:<br>– is designed to allow the user to listen to recorded or broadcast sound or video; and<br>– primarily uses headphones or earphones that can be worn in or on or around the ears; and<br>– allows the user to walk around while in use.<br>NOTE 1 Examples are hand-held or body-worn portable CD players, MP3 audio players, mobile phones with MP3 type features, PDA's or similar equipment.<br>A personal music player and earphones or headphones intended to be used with personal music players shall comply with the requirements of this sub-clause.<br>The requirements in this sub-clause are valid for music or video mode only. | Not a personal music player. | N/A     |
|   | The requirements do not apply:<br>– while the personal music player is connected to an external amplifier; or<br>– while the headphones or earphones are not used.<br>NOTE 2 An external amplifier is an amplifier which is not part of the personal music player or the listening device, but which is intended to play the music as a standalone music player.   | Not a personal music player. | N/A     |

**Attachment No.1**

Date: 2016-10-18

Page 6 of 15

Rpt. No.: 72120951-000

| <b>IEC 60950-1, GROUP DIFFERENCES (CENELEC common modifications EN)</b> |  |                              |         |
|---|--|------------------------------|---------|
| Clause  | Requirement + Test   | Result - Remark              | Verdict |
|   | <p>The requirements do not apply to:</p> <ul style="list-style-type: none"> <li>– hearing aid equipment and professional equipment;</li> </ul> <p>NOTE 3 Professional equipment is equipment sold through special sales channels. All products sold through normal electronics stores are considered not to be professional equipment.</p> <ul style="list-style-type: none"> <li>– analogue personal music players (personal music players without any kind of digital processing of the sound signal) that are brought to the market before the end of 2015.</li> </ul> <p>NOTE 4 This exemption has been allowed because this technology is falling out of use and it is expected that within a few years it will no longer exist. This exemption will not be extended to other technologies.</p>   | Not a personal music player. | N/A     |
|   | <p>For equipment which is clearly designed or intended for use by young children, the limits of EN 71-1 apply.</p>   | Not a personal music player. | N/A     |
|   | <p><b>Zx.2 Equipment requirements</b></p> <p>No safety provision is required for equipment that complies with the following:</p> <ul style="list-style-type: none"> <li>– equipment provided as a package (personal music player with its listening device), where the acoustic output <math>L_{Aeq,T}</math> is <math>\leq 85</math> dBA measured while playing the fixed "programme simulation noise" as described in EN 50332-1; and</li> <li>– a personal music player provided with an analogue electrical output socket for a listening device, where the electrical output is <math>\leq 27</math> mV measured as described in EN 50332-2, while playing the fixed "programme simulation noise" as described in EN 50332-1.</li> </ul> <p>NOTE 1 Wherever the term acoustic output is used in this clause, the 30 s A-weighted equivalent sound pressure level <math>L_{Aeq,T}</math> is meant. See also Zx.5 and Annex Zx.</p> | Not a personal music player. | N/A     |

**Attachment No.1**

Date: 2016-10-18

Page 7 of 15

Rpt. No.: 72120951-000

| IEC 60950-1, GROUP DIFFERENCES (CENELEC common modifications EN) |   |                              |         |
|--|---|------------------------------|---------|
| Clause   | Requirement + Test  | Result - Remark              | Verdict |
|  | <p>All other equipment shall:</p> <p>a) protect the user from unintentional acoustic outputs exceeding those mentioned above; and</p> <p>b) have a standard acoustic output level not exceeding those mentioned above, and automatically return to an output level not exceeding those mentioned above when the power is switched off; and c) provide a means to actively inform the user of the increased sound pressure when the equipment is operated with an acoustic output exceeding those mentioned above. Any means used shall be acknowledged by the user before activating a mode of operation which allows for an acoustic output exceeding those mentioned above. The acknowledgement does not need to be repeated more than once every 20 h of cumulative listening time; and</p> <p>NOTE 2 Examples of means include visual or audible signals. Action from the user is always required.</p> <p>NOTE 3 The 20 h listening time is the accumulative listening time, independent how often and how long the personal music player has been switched off.</p> <p>d) have a warning as specified in Zx.3; and</p> <p>e) not exceed the following:</p> <p>1) equipment provided as a package (player with its listening device), the acoustic output shall be <math>\leq 100</math> dBA measured while playing the fixed "programme simulation noise" described in EN 50332-1; and</p> <p>2) a personal music player provided with an analogue electrical output socket for a listening device, the electrical output shall be <math>\leq 150</math> mV measured as described in EN 50332-2, while playing the fixed "programme simulation noise" described in EN 50332-1.</p> | Not a personal music player. | N/A     |




**Attachment No.1**

Date: 2016-10-18

Page 8 of 15

Rpt. No.: 72120951-000

| <b>IEC 60950-1, GROUP DIFFERENCES (CENELEC common modifications EN)</b> |  |                              |         |
|---|--|------------------------------|---------|
| Clause  | Requirement + Test   | Result - Remark              | Verdict |
|   | <p>For music where the average sound pressure (long term <math>L_{Aeq,T}</math>) measured over the duration of the song is lower than the average produced by the programme simulation noise, the warning does not need to be given as long as the average sound pressure of the song is below the basic limit of 85 dBA. In this case T becomes the duration of the song.</p> <p>NOTE 4 Classical music typically has an average sound pressure (long term <math>L_{Aeq,T}</math>) which is much lower than the average programme simulation noise. Therefore, if the player is capable to analyse the song and compare it with the programme simulation noise, the warning does not need to be given as long as the average sound pressure of the song is below the basic limit of 85 dBA.</p> <p>For example, if the player is set with the programme simulation noise to 85 dBA, but the average music level of the song is only 65 dBA, there is no need to give a warning or ask an acknowledgement as long as the average sound level of the song is not above the basic limit of 85 dBA.</p> | Not a personal music player. | N/A     |
|   | <p><b>Zx.3 Warning</b></p> <p>The warning shall be placed on the equipment, or on the packaging, or in the instruction manual and shall consist of the following:</p> <ul style="list-style-type: none"> <li>– the symbol of Figure 1 with a minimum height of 5 mm; and</li> <li>– the following wording, or similar:<br/>"To prevent possible hearing damage, do not listen at high volume levels for long periods."</li> </ul> <div style="text-align: center;">  </div> <p><b>Figure 1 – Warning label (IEC 60417-6044)</b></p> <p>Alternatively, the entire warning may be given through the equipment display during use, when the user is asked to acknowledge activation of the higher level.</p>   | Not a personal music player. | N/A     |

**Attachment No.1**

Date: 2016-10-18

Page 9 of 15

Rpt. No.: 72120951-000

| <b>IEC 60950-1, GROUP DIFFERENCES (CENELEC common modifications EN)</b>   |   |                              |         |
|---|---|------------------------------|---------|
| Clause  | Requirement + Test  | Result - Remark              | Verdict |
| <b>Zx.4 Requirements for listening devices (headphones and earphones)</b> |   |                              |         |
|   | <p><b>Zx.4.1 Wired listening devices with analogue input</b><br/>           With 94 dBA sound pressure output <math>L_{Aeq,T}</math>, the input voltage of the fixed "programme simulation noise" described in EN 50332-2 shall be <math>\geq 75</math> mV.<br/>           This requirement is applicable in any mode where the headphones can operate (active or passive), including any available setting (for example built-in volume level control).<br/>           NOTE The values of 94 dBA – 75 mV correspond with 85dBA – 27 mV and 100 dBA – 150 mV.</p>   | Not a personal music player. | N/A     |
|   | <p><b>Zx.4.2 Wired listening devices with digital input</b><br/>           With any playing device playing the fixed "programme simulation noise" described in EN 50332-1 (and respecting the digital interface standards, where a digital interface standard exists that specifies the equivalent acoustic level), the acoustic output <math>L_{Aeq,T}</math> of the listening device shall be <math>\leq 100</math> dBA.<br/>           This requirement is applicable in any mode where the headphones can operate, including any available setting (for example built-in volume level control, additional sound feature like equalization, etc.).<br/>           NOTE An example of a wired listening device with digital input is a USB headphone.</p>   | Not a personal music player. | N/A     |
|   | <p><b>Zx.4.3 Wireless listening devices</b><br/>           In wireless mode:<br/>           – with any playing and transmitting device playing the fixed programme simulation noise described in EN 50332-1; and<br/>           – respecting the wireless transmission standards, where an air interface standard exists that specifies the equivalent acoustic level; and<br/>           – with volume and sound settings in the listening device (for example built-in volume level control, additional sound feature like equalization, etc.) set to the combination of positions that maximize the measured acoustic output for the abovementioned programme simulation noise, the acoustic output <math>L_{Aeq,T}</math> of the listening device shall be <math>\leq 100</math> dBA.<br/>           NOTE An example of a wireless listening device is a Bluetooth headphone.</p> | Not a personal music player. | N/A     |



**Attachment No.1**

Date: 2016-10-18

Page 10 of 15

Rpt. No.: 72120951-000

| <b>US – United States of America</b> |  |   |     |
|--------------------------------------|--|---|-----|
|                                      | <b>National Differences + A1:2012-01-29 Bulletin Information</b>   |   | P   |
| <b>N-C = National Condition</b>      |  |   | P   |
| 1.1.1<br>N-C                         | All equipment is to be designed to allow installation in accordance with the National Electrical Code (NEC), ANSI/NFPA 70, the Canadian Electrical Code (CED), Part I, CAN/CSA C22.1, and when applicable, the National Electrical Safety Code, IEEE C2.<br><br>Also, unless marked or otherwise identified, installation is allowed per the Standard for the Protection of Electronic Computer/Data-Processing Equipment, ANSI/NFPA 75.                     | Considered.   | —   |
| 1.1.2                                | Baby monitors are required to additionally comply with ASTM F2951, Consumer Safety Specification for Baby Monitors.  | Not a baby monitor.   | N/A |
| 1.4.14<br>N-C                        | For Pluggable Equipment Type A, the protection in the installation is assumed to be 20 A.  | Not for connection to a.c. mains.   | N/A |
| 1.5.5<br>N-C                         | For lengths exceeding 3.05 m, external interconnecting flexible cord and cable assemblies are required to be a suitable cable type specified in the NEC<br><br>For lengths 3.05 m or less, external interconnecting flexible cord and cable assemblies that are not types specified in the NEC are required to have special construction features and identification markings.   | All external interconnecting cables are suitable cable type specified in the NEC. | P   |
| 1.7.1<br>N-C                         | Equipment for use on a.c. mains supply systems with a neutral and more than one phase conductor (e.g. 120/240 V, 3-wire) require a special marking format for electrical ratings.<br><br>A voltage rating that exceeds an attachment plug cap rating is only permitted if it does not exceed the extreme operating conditions in Table 2 of CAN/CSA C22.2 No. 235, and if it is part of a range that extends into the Table 2 "Normal Operating Conditions." | Not for connection to a.c. mains.   | N/A |
|                                      | Likewise, a voltage rating shall not be lower than the specified "Normal Operating Conditions," unless it is part of a range that extends into the "Normal Operating Conditions."  |   |     |
| 1.7.7<br>N-C                         | Wiring terminals intended to supply Class 2 outputs in accordance with the NEC or CEC Part 1 shall be marked with the voltage rating and "Class 2" or equivalent. The marking shall be located adjacent to the terminals and shall be visible during wiring.   | No such terminals.  | N/A |

**Attachment No.1**

Date: 2016-10-18

Page 11 of 15

Rpt. No.: 72120951-000

| <b>IEC 60950-1, GROUP DIFFERENCES (CENELEC common modifications EN)</b> |  |                                      |         |
|---|--|--------------------------------------|---------|
| Clause  | Requirement + Test   | Result - Remark                      | Verdict |
| 2.5<br>N-C  | Where a fuse is used to provide Class 2, Limited Power Source, or TNV current limiting, it shall not be operator-accessible unless it is not interchangeable.  | Not used.                            | N/A     |
| 2.6.3.3<br>N-C  | The first column on Table 2D modified to require, "Smaller of the RATED CURRENT of the equipment or the PROTECTIVE CURRENT RATING of the circuit under consideration."   | Considered.                          | P       |
| 2.7.1<br>N-C  | Suitable NEC/CEC branch circuit protection rated at the maximum circuit rating is required for all standard supply outlets and receptacles (such as supplied in power distribution units) if the supply branch circuit protection is not suitable.<br><br>Power distribution transformers distributing power at 100 volts or more, and rated 10 kVA or more, require special transformer overcurrent protection. | 20A branch circuit protection.       | N/A     |
| 3.2<br>N-C  | Wiring methods (terminals, leads, etc.) used for the connection of the equipment to the mains shall be in accordance with the NEC/CEC.   | Appliance inlet.                     | N/A     |
| 3.2.1<br>N-C  | Power supply cords are required to have attachment plugs rated not less than 125 percent of the rated current of the equipment.  | Power supply cord not evaluated.     | N/A     |
| 3.2.1.2<br>N-C  | Equipment connected to a centralized d.c. power system, and having one pole of the DC mains input terminal connected to the main protective earthing terminal in the equipment, is required to comply with special earthing, wiring, marking and installation instruction requirements.  | No connection to dc mains.           | N/A     |
| 3.2.3<br>N-C  | Permanent connection of equipment to the mains supply by a power supply cord is not permitted, except for certain equipment, such as ATMs.   | Not permanently connected equipment. | N/A     |
| 3.2.5<br>N-C  | Power supply cords are required to be no longer than 4.5 m in length.<br><br>Minimum cord length is required to be 1.5 m, with certain constructions such as external power supplies allowed to consider both input and output cord lengths into the requirement.<br><br>Flexible power supply cords are required to be compatible with Article 400 of the NEC, and Tables 11 and 12 of the CEC.                 | Power supply cord not evaluated.     | N/A     |
| 3.2.9<br>N-C  | Permanently connected equipment must have a suitable wiring compartment and wire bending space.  | Not permanently connected equipment. | N/A     |
| 3.3<br>N-C  | Wiring terminals and associated spacings for field wiring connections shall comply with CSA C22.2 No. 0.   | No wiring terminals.                 | N/A     |

**Attachment No.1**

Date: 2016-10-18

Page 12 of 15

Rpt. No.: 72120951-000

| <b>IEC 60950-1, GROUP DIFFERENCES (CENELEC common modifications EN)</b> |  |  |         |
|---|--|--|---------|
| Clause  | Requirement + Test   | Result - Remark  | Verdict |
| 3.3.3<br>N-C  | Wire binding screws are not permitted to attach conductors larger than 10 AWG (5.3 mm <sup>2</sup> ).  | No wire binding screws provided.   | N/A     |
| 3.3.4<br>N-C  | Terminals for permanent wiring, including protective earthing terminals, must be suitable for U.S./Canadian wire gauge sizes, rated 125 percent of the equipment rating, and be specially marked when specified (1.7.7).   | Not permanently connected equipment.   | N/A     |
| 3.3.5   | First column of Table 3E revised to require "Smaller of the RATED CURRENT of the equipment or the PROTECTIVE CURRENT RATING of the circuit under consideration."   | No wiring terminals.   | N/A     |
| 3.4.2<br>N-C  | Motor control devices are required for cord-connected equipment with a motor if the equipment is rated more than 12 A, or if the motor has a nominal voltage rating greater than 120 V, or is rated more than 1/3 hp (locked rotor current over 43 A).   | No connection to dc mains.   | N/A     |
| 3.4.8<br>N-C  | Vertically-mounted disconnect switches and circuit breakers are required to have the "on" position indicated by the handle in the up position.   | No disconnect switches.  | N/A     |
| 3.4.11<br>N-C   | For computer room applications, equipment with battery systems capable of supplying 750 VA for five minutes are required to have a battery disconnect means that may be connected to the computer room remote power-off circuit.   | No batteries.  | N/A     |
| 4.3.12<br>N-C   | The maximum quantity of flammable liquid stored in equipment is required to comply with NFPA 30.   | No flammable liquids in the equipment.   | N/A     |
| 4.3.13.5<br>N-C   | Equipment with lasers is required to meet the U.S. Code of Federal Regulations 21 CFR 1040 (and the Canadian Radiation Emitting Devices Act, REDR C1370).  | Laser printer is certified and is <i>compliant with 21 CFR 1040.</i>   | P       |
| 4.7<br>N-C  | For computer room applications, automated information storage systems with combustible media greater than 0.76 m <sup>3</sup> (27 cu ft) are required to have a provision for connection of either automatic sprinklers or a gaseous agent extinguishing system with an extended discharge.  | The equipment has no combustible area greater than 27 cubic feet.  | N/A     |
| 4.7.3.1<br>N-C  | For computer room applications, enclosures with combustible material measuring greater than 0.9 m <sup>2</sup> (10 sq ft) or a single dimension greater than 1.8 m (6 ft) are required to have a flame spread rating of 50 or less.<br><br>For other applications, enclosures with the same dimensions require a flame spread rating of 200 or less. | The equipment has no combustible material greater than 0.93m <sup>2</sup> or single dimension greater than 1.8m. | N/A     |
| 4.7.3.1   | Non-metallic enclosures of equipment for use in spaces used for environmental air (plenums) are required to comply with UL 2043.   | Not for use in air plenums.  | N/A     |

**Attachment No.1**

Date: 2016-10-18

Page 13 of 15

Rpt. No.: 72120951-000

| <b>IEC 60950-1, GROUP DIFFERENCES (CENELEC common modifications EN)</b> |  |  |         |
|---|--|--|---------|
| Clause  | Requirement + Test   | Result - Remark  | Verdict |
| Annex H<br>N-C  | Equipment that produces ionizing radiation is required to comply with the U.S. Code of Federal Regulations, 21 CFR 1020 (and the Canadian Radiation Emitting Devices Act, REDR C1370).   | The equipment does not produce ionizing radiation.   | N/A     |
| <b>N-D = National Differences</b>                                       |  |  | P       |
| 1.5.1<br>N-D  | Some components and materials associated with the risk of fire, electric shock, or personal injury are required to have component or material ratings in accordance with the applicable national (U.S. and Canadian) component or material requirements.<br><br>These components include:<br>attachment plugs, battery packs (rechargeable type, used with transportable equipment), cathode ray tubes, circuit breakers, communication circuit accessories, connectors (used for current interruption of non-LPS circuits), cord sets and power supply cords, direct plug-in equipment, enclosures (outdoor), flexible cords and cables, fuses (branch circuit), fuseholders, ground-fault current interrupters, industrial control equipment, insulating tape, interconnecting cables, lampholders, limit controls, printed wiring, protectors for communications circuits, receptacles, solid state controls, supplementary protectors, switches (including interlock switches), thermal cutoffs, thermostats, (multi-layer) transformer winding wire, transient voltage surge suppressors, tubing, wire connectors, and wire and cables. | All critical components are IEC, CSA, or UL certified.<br><br>See appended table 1.5.1 in this report. | P       |
| 1.6.1.2<br>N-D  | A circuit for connection to the DC Mains Supply is classified as either a SELV Circuit, TNV-2 Circuit or Hazardous Voltage Circuit depending on the maximum operating voltage of the supply.<br><br>This maximum operating voltage is to include consideration of the battery charging "float voltage" associated with the intended supply system, regardless of the marked power rating of the equipment.   | Not for connection to dc. mains.   | N/A     |
| 2.3.1<br>N-D  | For TNV-2 and TNV-3 circuits with other than ringing signals and with voltages exceeding 42.4 Vpeak or 60 Vd.c., the max. acceptable current through a 2000 ohm resistor (or greater) connected across the voltage source with other loads disconnected is 7.1 mA peak or 30 mA d.c. under normal operating conditions.  | No TNV circuits.   | N/A     |
| 2.3.2.1<br>N-D  | In the event of a single fault between TNV and SELV circuits, the limits of 2.2.3 apply to SELV Circuits and accessible conductive parts.  | No TNV circuits.   | N/A     |

**Attachment No.1**

Date: 2016-10-18

Page 14 of 15

Rpt. No.: 72120951-000

| <b>IEC 60950-1, GROUP DIFFERENCES (CENELEC common modifications EN)</b> |  |   |         |
|---|--|---|---------|
| Clause  | Requirement + Test   | Result - Remark   | Verdict |
| 2.6.2<br>N-D  | Equipment with functional earthing is required to be marked with the functional earthing symbol (IEC 60417-6092).  | No functional earthing.   | N/A     |
| 2.6.3.3   | The current rating of the circuit <u>shall be taken as 20 A</u> not 16 A.  | Considered.   | —       |
| 2.6.3.4<br>N-D  | Protective bonding conductors of non-standard protective bonding constructions (e.g., printed circuit traces) may be subjected to the additional limited short circuit test conditions specified.  | No non-standard bonding constructions used.   | N/A     |
| 4.2.8.1<br>N-D  | Enclosures around CRTs with a face diameter of 160 mm or more are required to reduce the risk of injury due to the implosion of the CRT.   | Not a CRT.  | N/A     |
| 4.2.11<br>N-D   | For equipment intended for mounting on racks and provided with slide/rails allowing the equipment to slide away from the rack for installation, service and maintenance, additional construction, performance and marking requirements are applicable to determine the adequacy of the slide/rails.  | National Difference removed per A1.   | —       |
| 4.3.2<br>N-D  | Equipment with handles is required to comply with special loading tests.   | DS450 has two metal handles 16mm in thickness. Complies with loading test. Weight of equipment is 58.5kg with weight of 117kg applied to each handle. | P       |
| 4.3.8<br>N-D  | Battery packs for both portable and stationary applications are required to comply with special component requirements.  | No battery packs unless part of certified equipment.  | N/A     |
| 5.1.8.3<br>N-D  | Equipment intended to receive telecommunication ringing signals is required to comply with a special touch current measurement tests.  | No TNV circuits.  | N/A     |
| 5.3.7<br>N-D  | Internal (e.g., card cage) SELV circuit connectors and printed wiring board connectors that are accessible to the operator and that deliver power are to be overloaded.<br><br>During abnormal operating testing, if a circuit is interrupted by the opening of a component, the test shall be repeated twice (three tests total) using new components as necessary. | No internal SELV circuit connectors or printed wiring board connectors that deliver power are accessible to the operator.                             | N/A     |
| 6.4<br>N-D  | Equipment intended for connection to telecommunication network outside plant cable is required to be protected against overvoltage from power line crosses in accordance with 6.4 and Annex NAC.   | No TNV circuits.  | N/A     |

**Attachment No.1**

Date: 2016-10-18

Page 15 of 15

Rpt. No.: 72120951-000

| <b>IEC 60950-1, GROUP DIFFERENCES (CENELEC common modifications EN)</b> |  |  |         |
|---|--|--|---------|
| Clause  | Requirement + Test   | Result - Remark                          | Verdict |
| Annex EE  | UL articulated accessibility probe (Fig EE.3) required for assessing accessibility to document/media shredders instead of the Figure 2A test finger.   | Not a document / media shredder.         | N/A     |
| Annex M.2<br>N-D  | Continuous ringing signals up to 16 mA only are permitted if the equipment is subjected to special installation and performance restrictions.  | No TNV circuits.                         | N/A     |
| Annex NAD<br>N-D  | Equipment connected to a telecommunication and cable distribution networks and supplied with an earphone intended to be held against, or in the ear is required to comply with special acoustic pressure requirements. | No earpiece provided with the equipment. | N/A     |
| Annex NAF   | <del>Document (paper) shredders likely to be...</del>  | Deleted per A1.                          | —       |

**Note: Before placing the products in the different countries, the manufacturer must ensure that:**

- Operating Instructions, Ratings Labels and Warnings Labels shall be written in an Accepted or Official Language of the county in question.  
**Instructions and other text required by this standard shall be written in the official language of the country in which the equipment is to be sold. This includes warnings/caution markings.**  
**According to the German Equipment Safety Law the user manual has to contain the following points, if applicable, since all are safety relevant points:**
  - kind of mounting/installation
  - instruction about handling at use of the devices (possibly forbiddance of certain work processes)
  - maintenance
  - accessories
  - spare parts
- The end product shall comply with the National Standards and/or Electrical Codes of the country in question.

----- END REPORT -----





## **ATTACHMENT # 2**

### **Photograph Documentation**

|                     |                |
|---------------------|----------------|
| <b>TOTAL PAGES:</b> | <b>5 pages</b> |
| <b>COVER PAGE:</b>  | <b>1 page</b>  |
| <b>PHOTOS:</b>      | <b>4 pages</b> |

Model DS450 plus Cart with Side Work Surfaces Opened (Front View):




Model DS450 plus Cart with Side Work Surfaces Opened (Rear View):





Model DS450 with Rear Enclosure Removed:

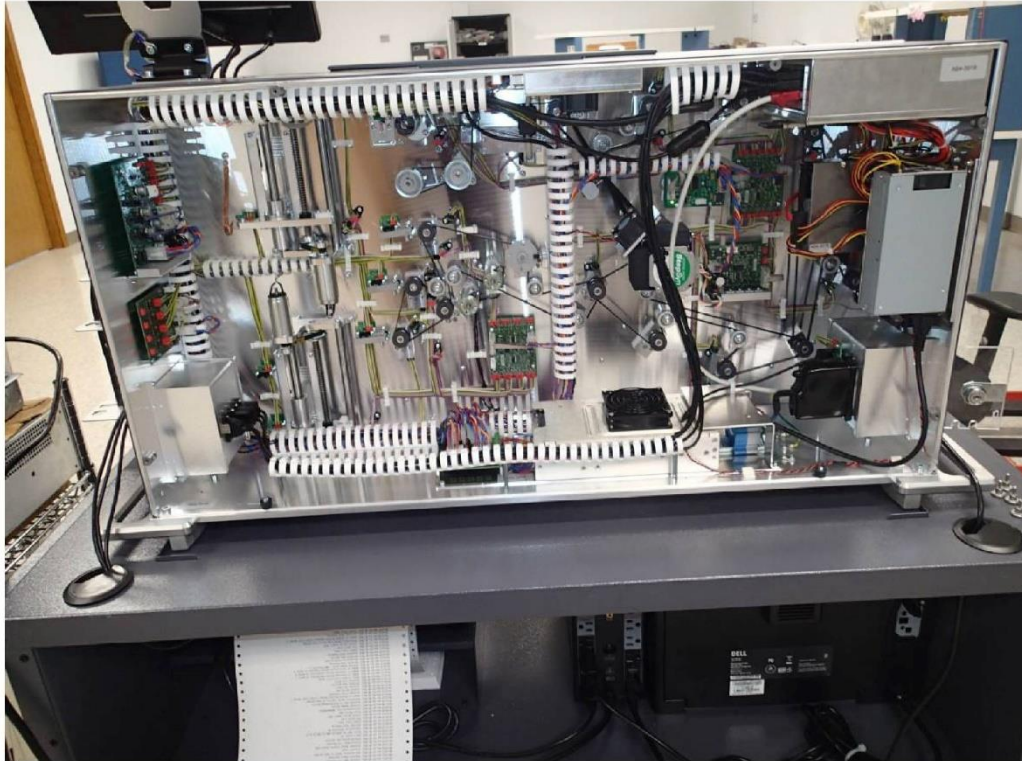



**END OF TEST REPORT**